

# LUNA LA325 / LA395



White




## Features & Benefits


Luna is an economical ceiling luminaire, with PS diffuser and metal housing. Well suited to be used as a basic or general interior light source.

- 1
- Cable entry from back
- 2
- Ceiling mounted
- 3
- Sensor function available


## Function

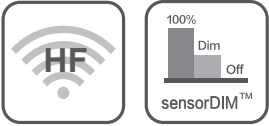

## Dimensions

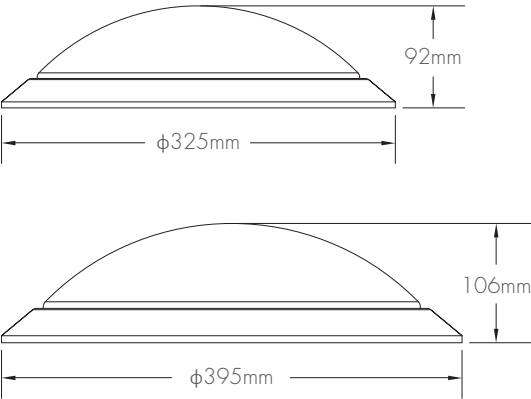

## Photometrics

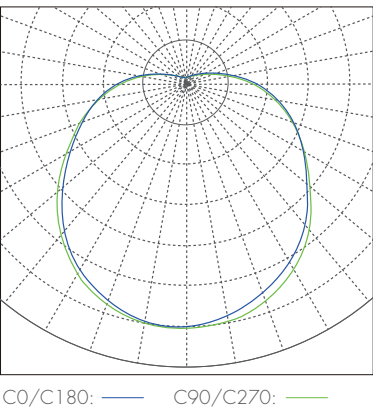

## Lumen Output

| Model | Power | 3000K  | 4000K  | 5000K  |        | Colour Temp. | Lumen Efficiency |
|-------|-------|--------|--------|--------|--------|--------------|------------------|
| LA325 | 18W   | 1620lm | 1700lm | 1790lm | (±10%) | 3000K        | 85 lm/W          |
| LA395 | 28W   | 2520lm | 2650lm | 2780lm | (±10%) | 4000K        | 90 lm/W          |
|       |       |        |        |        |        | 5000K        | 95 lm/W          |

Customized higher lumen output available

## Specification

| Input Voltage | CRI | Power Factor | SDCM | Beam Angle | Operation Temp. | IP   | Fitting Material           |
|---------------|-----|--------------|------|------------|-----------------|------|----------------------------|
| 220~240VAC    | >80 | >0.9         | 3    | 120°       | -20°C~+40°C     | IP20 | Iron Housing + PS Diffuser |

| Class | Standard Lifespan | Premium Lifespan                   | Standard                    |
|-------|-------------------|------------------------------------|-----------------------------|
| I     | L70B50: 50,000h   | L70B50: 125,000h / L80B10: 65,000h | EN60598-2-1/EN55015/EN62778 |

| Model | Carton (L x W x H) | QTY/CTN | QTY/20'GP           | QTY/40'GP           | QTY/40'HQ           |
|-------|--------------------|---------|---------------------|---------------------|---------------------|
| LA325 | 41 x 39.5 x 40 cm  | 4 pcs   | 1540 PCS / 385 CTNS | 3396 PCS / 849 CTNS | 3828 PCS / 957 CTNS |
| LA395 | 46 x 43.5 x 44 cm  | 4 pcs   | 1132 PCS / 283 CTNS | 2496 PCS / 624 CTNS | 2816 PCS / 704 CTNS |