


SURFACE LIGHT





Aurora is a stylish PC luminaire with a slim profile ensuring its modern look. It is ideal for setting up in publicly accessible areas, such as stairwells, hallways, passageways, metro and train stations, and can also be used in institutions and schools, residential areas.

- 1 • Reserved BESA holes, key holes • Cable entry from side and back • Through wiring from side to side
- 2 • IP54 water-proof • IK10 vandal-proof
- 3 • Optional selectable color temperature • Optional selectable power
- 4 • Ceiling / wall / suspended / recessed / track mounted • Quick and easy installation with separate base
- 5 • Wide choice of intelligent functions, with / without Bluetooth, human centric, sensor, emergency, DALI, etc.

Metal ring accessory with UGR anti-glare film can be ordered individually and easily mounted on the diffuser. Color & logo can be customized.




SURFACE LIGHT

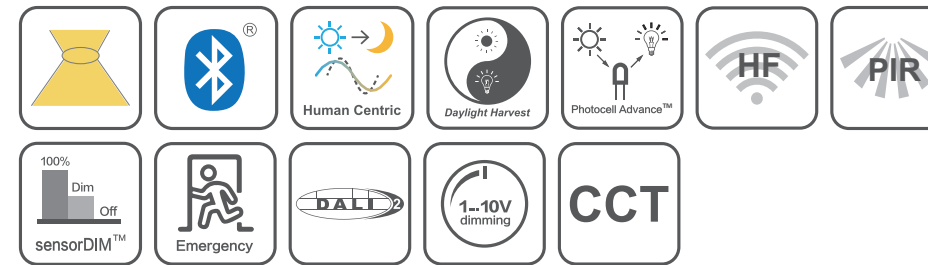

Dimension



Photometrics

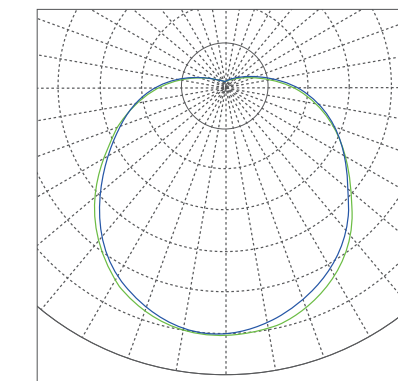

Lumen Output

Model	Power	3000K	4000K	5000K
		105 lm/W	110 lm/W	115 lm/W
A320	10W	1090 lm	1126 lm	1200 lm
A320	18W	2010 lm	2050 lm	2120 lm
A320	22W	2400 lm	2470 lm	2540 lm
A320	28W	2970 lm	3020 lm	3070 lm

• Lumen may fluctuate between ± 10%. Customized higher lumen output available.

Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	120°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP54
IK Rating	IK10
Fitting Material	Polycarbonate

Electrical Class	II
Standard Lifespan	L70B50: 68,000h
Premium Lifespan	L70B50: 176,000h L80B10: 95,000h
Standard	EN60598-2-1 / EN55015 / EN62778 / EN60598-2-22
Emergency Lumen	200 ~ 400 lm
Battery	3h Duration

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
AOR014	A320	10/22W		●							30/50K	128 lm/W	∅ 320 * H 57
AOR015	A320	10/22W	●								30/50K	128 lm/W	∅ 320 * H 57
AOR016	A320	13/22W			●	●					30/50K	128 lm/W	∅ 320 * H 57