




Dana is a domed PC luminaire with a focus on anti-ligature design. It is intended for circulation routes, pedestrian path, corridor, staircases, utility rooms, balconies and terraces, residential, bathrooms, etc.

- 1 • Reserved BESA holes • Cable entry from side and back
• Through wiring from side to side
- 2 • IP65 water-proof • IK10 vandal-proof
- 3 • Optional selectable color temperature • Optional selectable power
- 4 • Ceiling /wall mounted
- 5 • Wide choice of intelligent functions, with/without Bluetooth, human centric, sensor, emergency, DALI, etc.





Anti-theft & retained screw design

Photometrics

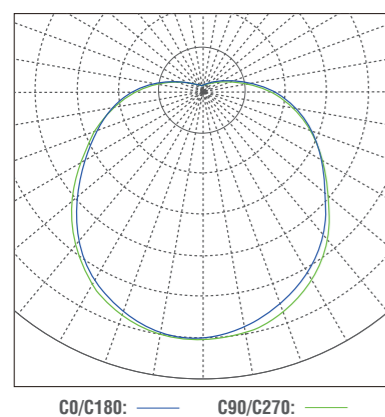

Dimension

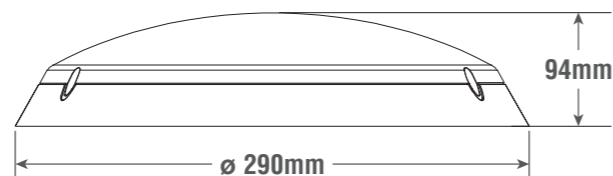

Lumen Output

Model	Power	3000K	4000K	5000K
		95 lm/W	100 lm/W	105 lm/W
D290-S	12W	1080 lm	1116 lm	1140 lm
D290-S	18W	1620 lm	1674 lm	1710 lm
D290-S	20W	1800 lm	1860 lm	1900 lm
D290-B	12W	1176 lm	1236 lm	1260 lm
D290-B	18W	1764 lm	1854 lm	1890 lm
D290-B	20W	2156 lm	2266 lm	2310 lm

- D290-S means LEDs on the side. D290-B means LEDs on the bottom.
- Lumen may fluctuate between $\pm 10\%$. Customized higher lumen output available.

Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	120°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP65
IK Rating	IK10
Fitting Material	Polycarbonate

Electrical Class	II
Standard Lifespan	L70B50: 68,000h
Premium Lifespan	L70B50: 176,000h L80B10: 95,000h
Standard	EN60598-2-1 / EN55015 / EN62778 / EN60598-2-22
Emergency Lumen	200 ~ 400 lm
Battery	3h Duration

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
DAN004	D290	12W	●								30K	110 lm/W	∅ 290 * H 94
DAN010	D290	12W					●				30K	110 lm/W	∅ 290 * H 94
DAN012	D290	20W					●				40K	110 lm/W	∅ 290 * H 94
DAN013	D290	20W		●			●				40K	110 lm/W	∅ 290 * H 94
DAN015	D290	20W		●							40K	120 lm/W	∅ 290 * H 94
DAN019	D290	12W		●			●				30K	110 lm/W	∅ 290 * H 94
DAN021	D290	12W		●							40K	120 lm/W	∅ 290 * H 94
DAN023	D290	20W	●								40K	120 lm/W	∅ 290 * H 94