




Acis is a stylish cast aluminum luminaire, with a modern look and low height. The luminaire can be delivered in several colors and with multiple rings, which gives different visual expression. It can be used as facade lighting and common areas in housing and profession.

- 1 • Cable entry from side and back • Through wiring from side to side
- 2 • IP65 water-proof • IK10 vandal-proof
- 3 • Optional selectable color temperature • Optional selectable power
- 4 • Ceiling / Wall mounted • Quick installation thanks to tiltable LED plate
- 5 • Powder coated paint finish • UV-proof diffuser
- 6 • Wide choice of intelligent functions, with/without Bluetooth, sensor, emergency, DALI, etc.




Tiltable PCB Plate




Ring Options

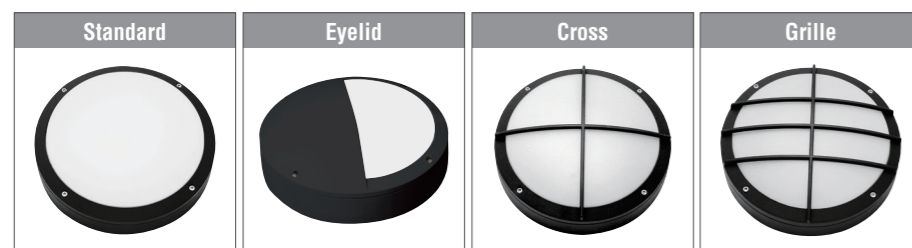

Dimension

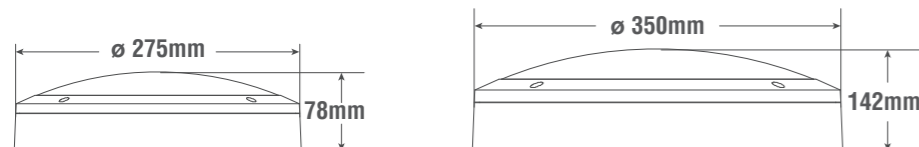

Photometrics

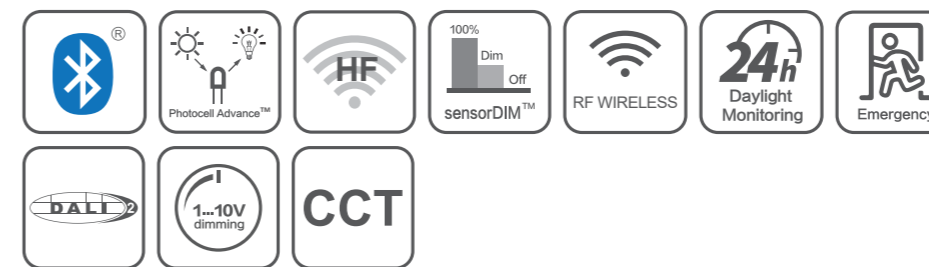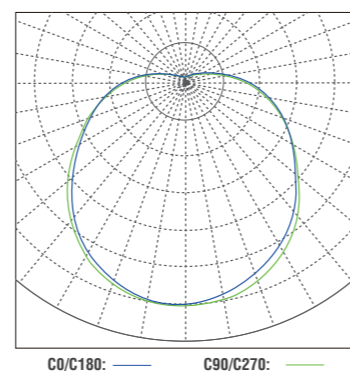

Lumen Output

Model	Power	3000K	4000K	5000K
		95 lm/W	100 lm/W	105 lm/W
AA275	18W	1890 lm	1920 lm	1960 lm
AA350	28W	2400 lm	2520 lm	2600 lm

• Lumen may fluctuate between $\pm 10\%$. Customized higher lumen output available.

Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	110°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP65
IK Rating	IK10
Fitting Material	Cast Aluminum

Electrical Class	I
Standard Lifespan	L70B50: 68,000h
Premium Lifespan	L70B50: 176,000h L80B10: 95,000h
Standard	EN60598-2-1 / EN55015 / EN62778 / EN60598-2-22
Emergency Lumen	200 ~ 400 lm
Battery	3h Duration

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
ACI005	AA275	18W		●		●					30K	100 lm/W	∅ 275 * H 78
ACI020	AA275	18W		●							40K	105 lm/W	∅ 275 * H 78
ACI026	AA275	18W	●								40K	105 lm/W	∅ 275 * H 78