




Athos is a modern circular PC luminaire with anti-ligature feature. It is an ideal reinforcement for hallways, stairwells, corridors, walkways, covered car parks and garages, technical rooms, balconies and terraces.

- Reserved BESA holes, Key holes • Cable entry from side and back  
• Through wiring from side to side
- IP54 water-proof • IK10 vandal-proof • UV-proof optional
- Optional selectable color temperature • Optional selectable power
- Ceiling / Wall mounted • Quick installation thanks to tiltable LED plate
- Wide choice of intelligent functions, with/without Bluetooth, human centric, sensor, emergency, DALI, etc.






Tiltable PCB Plate

### Photometrics

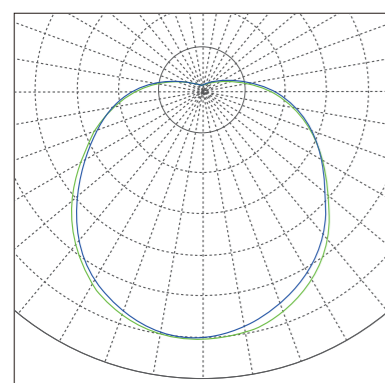

C0/C180: — C90/C270: —

### Dimension

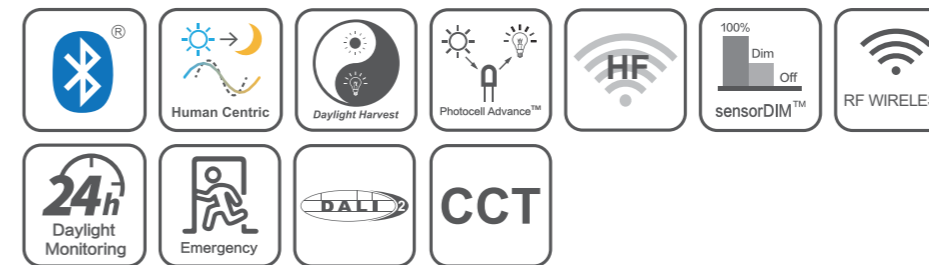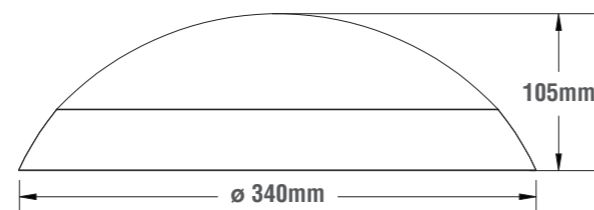

### Lumen Output

Model	Power	3000K	4000K	5000K
		95 lm/W	100 lm/W	105 lm/W
A340	15W	1425 lm	1500 lm	1530 lm
A340	22W	1980 lm	2090 lm	2134 lm

• Lumen may fluctuate between  $\pm 10\%$ . Customized higher lumen output available.

### Specification

Input Voltage	220-240VAC	Electrical Class	II
CRI	>80	Standard Lifespan	L70B50: 68,000h
Power Factor	>0.9	Premium Lifespan	L70B50: 176,000h L80B10: 95,000h
SDCM	3	Standard	EN60598-2-1 / EN55015 / EN62778 / EN60598-2-22
Beam Angle	120°	Emergency Lumen	200 ~ 400 lm
Operation Temp.	-20°C ~ +40°C	Battery	3h Duration
IP Rating	IP54		
IK Rating	IK10		
Fitting Material	Polycarbonate		

### Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
ATH001	A340	15W	●								40K	100 lm/W	∅ 340 * H 105