

# AURORA A400



White  
RAL9003




## ● Features & Benefits


Aurora is a stylish PC luminaire with a slim profile ensuring its modern look. Indirect lighting helps guarantee soft light, without glare. It is ideal for setting up in publicly accessible areas, such as stairwells, hallways, passageways, metro and train stations, and can also be used in institutions and schools, residential areas.

- 1 • BESA holes, Key holes • Cable entry from side and back • Through wiring from side to side
- 2 • IP54 water-proof • IK10 vandal-proof
- 3 • Optional selectable color temperature • Optional selectable power
- 4 • Ceiling /wall mounted, or installed in suspension • Quick and easy installation with separate base
- 5 • Wide choice of intelligent functions, with/without Bluetooth, human centric, sensor, emergency, DALI, etc.


## ● Function

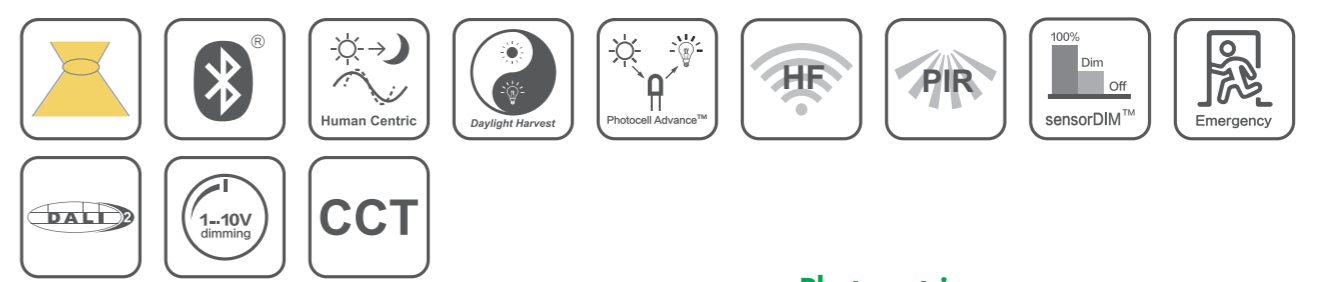

## ● Dimensions

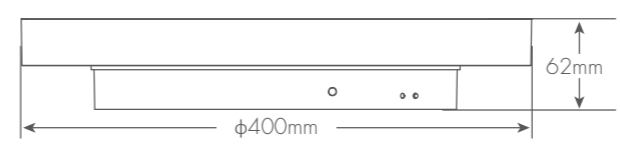

## ● Photometrics

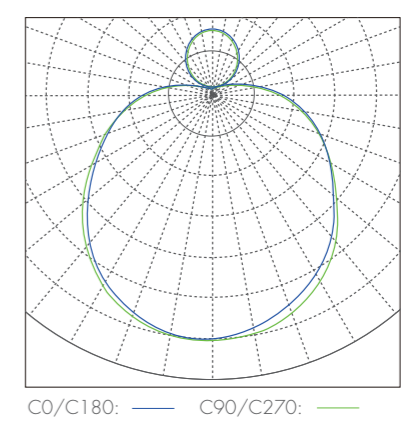

## ● Lumen Output

Model	Power	Colour Temp.				Lumen Efficiency
		3000K	4000K	5000K		
A400	22W	2450lm	2520lm	2590lm	(±10%)	105 lm/W
A400	28W	3020lm	3070lm	3120lm	(±10%)	110 lm/W
						115 lm/W

• Customized higher lumen output available. Max wattage: 32W

## ● Specification

Input Voltage	CRI	Power Factor	SDCM	Beam Angle	Operation Temp.	IP/IK	Fitting Material	Class
220~240VAC	>80	>0.9	3	120°	-20°C~+40°C	IP54/IK10	Polycarbonate	II

Standard Lifespan	Premium Lifespan	Standard	Emergency Lumen	Battery
L70B50: 50,000h	L70B50: 125,000h / L80B10: 65,000h	EN60598-2-1/EN55015/EN62778/EN60598-2-22	200lm~400lm	3h Duration

Carton (L x W x H)	QTY/CTN	QTY/20'GP	QTY/40'GP	QTY/40'HQ
44 x 42 x 42.5 cm	6 pcs	1908 PCS / 318 CTNS	4200 PCS / 700 CTNS	4734 PCS / 789 CTNS