

AURORA A320



White
RAL9003

Black
RAL9004




● Features & Benefits


Aurora is a stylish PC luminaire with a slim profile ensuring its modern look. It is ideal for setting up in publicly accessible areas, such as stairwells, hallways, passageways, metro and train stations, and can also be used in institutions and schools, residential areas.

- 1 • Reserved BESA holes, Key holes • Cable entry from side and back • Through wiring from side to side
- 2 • IP54 water-proof • IK10 vandal-proof
- 3 • Optional selectable color temperature • Optional selectable power
- 4 • Ceiling /wall mounted, or installed in suspension • Quick and easy installation with separate base
- 5 • Wide choice of intelligent functions, with/without Bluetooth, human centric, sensor, emergency, DALI, etc.


● Function

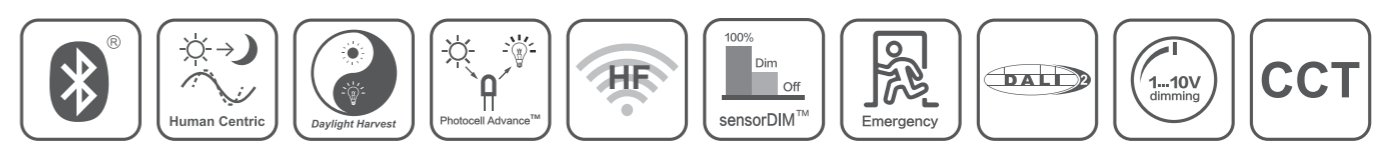

● Dimensions

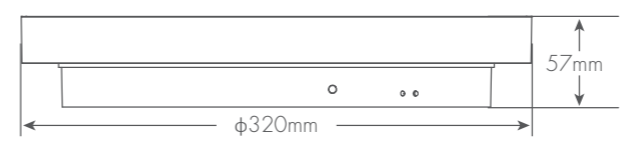

● Photometrics

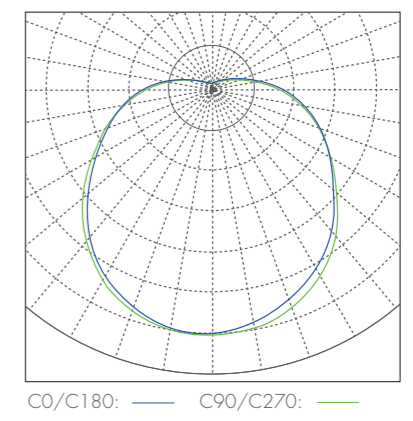

● Lumen Output

Model	Power	3000K	4000K	5000K	
A320	10W	1090lm	1126lm	1200lm	(±10%)
A320	18W	2010lm	2050lm	2120lm	(±10%)
A320	22W	2400lm	2470lm	2540lm	(±10%)
A320	28W	2970lm	3020lm	3070lm	(±10%)

Colour Temp.	Lumen Efficiency
3000K	105 lm/W
4000K	110 lm/W
5000K	115 lm/W

• Customized higher lumen output available

● Specification

Input Voltage	CRI	Power Factor	SDCM	Beam Angle	Operation Temp.	IP/IK	Fitting Material	Class
220~240VAC	>80	>0.9	3	120°	-20°C~+40°C	IP54/IK10	Polycarbonate	II

Standard Lifespan	Premium Lifespan	Standard	Emergency Lumen	Battery
L70B50: 50,000h	L70B50: 125,000h / L80B10: 65,000h	EN60598-2-1/EN55015/EN62778/EN60598-2-22	200lm~400lm	3h Duration

Carton (L x W x H)	QTY/CTN	QTY/20'GP	QTY/40'GP	QTY/40'HQ
52 x 34.1 x 34.1 cm	8 pcs	3304 PCS / 413 CTNS	7272 PCS / 909 CTNS	8200 PCS / 1025 CTNS