
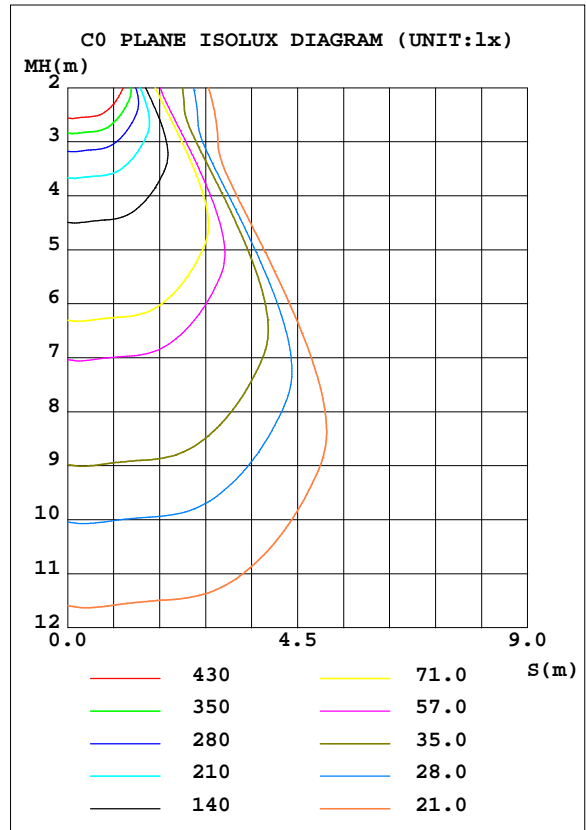


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.40V I:0.1720A P:36.000W PF:0.9410 Freq:50.00Hz Lamp Flux:4244.6x1 lm		
NAME: H6060-N 36W BTPIR 4000K	TYPE: 矩形	
MFR.:	DIM.: 596*596*12 (mm)	
	SUR.: 504*456 (mm)	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 117.91 lm/W			
MODEL		I _{max} (cd)	2951	S/MH(C0/180)	1.04
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH(C90/270)	0.90
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	4244.6	η UP, DN(C0-180)	1.2, 48.1
NOMINAL FLUX(lm)	4244.6	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.4, 49.3
LAMPS INSIDE	1	η up(%)	2.6	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	221.3	η down(%)	97.4	CIBSE SHR MAX	0.95

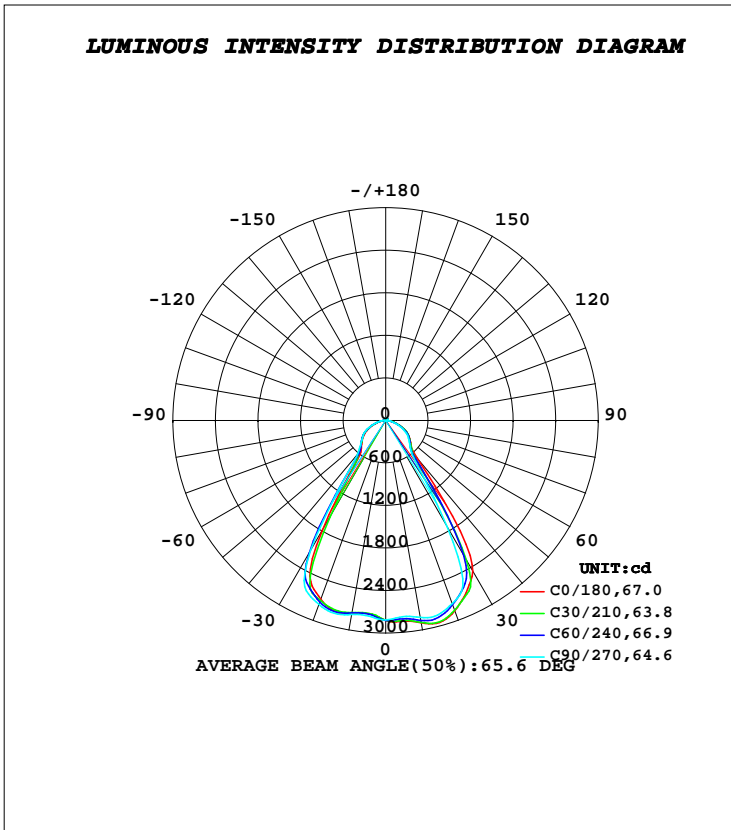

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-03-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GSD060YC+HCD038/BT+HIR07
灯板: H6060-N-10S38P-V6.0(A、B)
灯珠: 鸿利0.2W高光效

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2898	2877	2822	2772	2766	2754	2780	2840	0- 10	266.4	266.4	6.28,6.28
20	2856	2806	2747	2680	2683	2713	2760	2824	10- 20	799.0	1065	25.1,25.1
30	2455	2247	1733	1631	1794	1868	2121	2384	20- 30	1159	2225	52.4,52.4
40	693.6	585.9	560.4	546.2	541.1	578.6	619.6	678.9	30- 40	711.3	2936	69.2,69.2
50	457.3	445.7	430.4	427.0	434.5	445.2	444.1	462.6	40- 50	389.0	3325	78.3,78.3
60	351.3	347.4	321.3	324.9	323.6	344.4	347.8	363.5	50- 60	353.6	3679	86.7,86.7
70	209.8	202.5	183.3	180.5	183.7	203.3	210.4	222.0	60- 70	269.8	3948	93,93
80	79.62	77.88	64.23	63.82	65.05	82.48	87.30	95.39	70- 80	142.6	4091	96.4,96.4
90	10.91	8.789	7.241	7.913	10.71	12.30	15.13	18.86	80- 90	43.59	4135	97.4,97.4
100	8.519	8.810	8.992	9.172	12.91	12.56	12.28	12.08	90-100	11.00	4146	97.7,97.7
110	10.76	11.00	11.53	11.79	15.23	14.81	14.45	14.24	100-110	12.43	4158	98,98
120	14.09	14.50	15.22	15.62	18.54	17.94	17.40	16.99	110-120	14.39	4172	98.3,98.3
130	18.64	19.08	19.78	20.26	22.92	22.24	21.50	20.97	120-130	16.48	4189	98.7,98.7
140	22.77	22.85	23.24	23.33	26.08	25.56	25.12	24.67	130-140	17.45	4206	99.1,99.1
150	24.62	24.41	24.63	24.62	27.05	26.77	26.60	26.40	140-150	15.69	4222	99.5,99.5
160	26.07	25.81	26.14	26.20	27.44	27.03	27.08	26.95	150-160	12.05	4234	99.8,99.8
170	28.11	28.20	28.33	28.52	28.83	28.56	28.28	28.27	160-170	7.743	4242	99.9,99.9
180	29.58	29.57	29.43	29.53	29.62	29.58	29.39	29.52	170-180	2.760	4245	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-03-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: 电源: LF-GSD060YC+HCD038/BT+HIR07
 灯板: H6060-N-10S38P-V6.0(A、B)
 灯珠: 鸿利0.2W高光效

LUMINANCE LIMITATION CURVES

Test:U:221.40V I:0.1720A P:36.000W PF:0.9410 Freq:50.00Hz Lamp Flux:4244.6x1 lm		
NAME: H6060-N 36W BTPIR 4000K	TYPE: 矩形	
MFR.:	DIM.: 596*596*12 (mm)	
	SUR.: 504*456 (mm)	

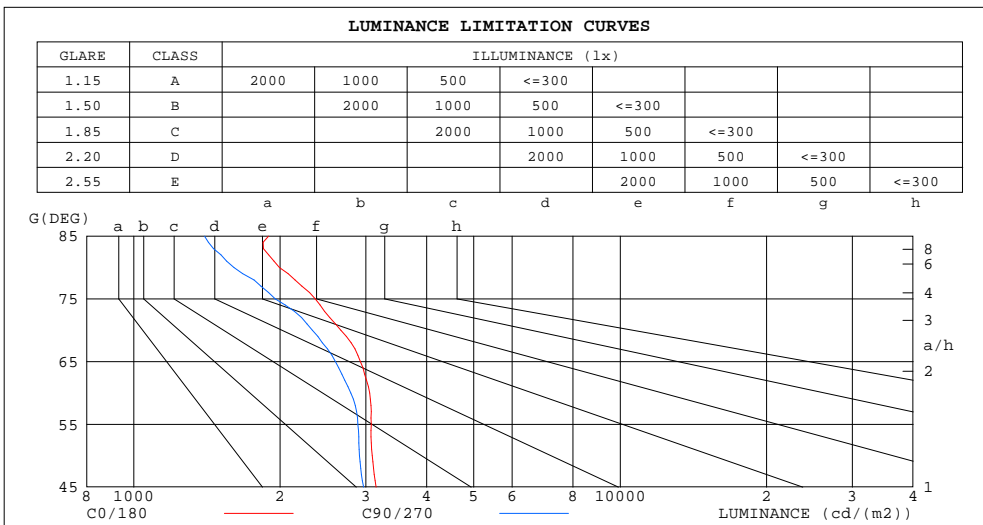

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1892	1399
80	1994	1608
75	2362	1954
70	2667	2330
65	2923	2600
60	3055	2794
55	3077	2890
50	3093	2911
45	3152	2971


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-03-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GSD060YC+HCD038/BT+HIR07
灯板: H6060-N-10S38P-V6.0(A、B)
灯珠: 鸿利0.2W高光效

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.40V I:0.1720A P:36.000W PF:0.9410 Freq:50.00Hz Lamp Flux:4244.6x1 lm		
NAME: H6060-N 36W BTPIR 4000K	TYPE: 矩形	
MFR.:	DIM.: 596*596*12 (mm)	
	SUR.: 504*456 (mm)	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.07	1.03	1.00	1.04	1.01	.98	.00	.97	.95	.95	.93	.92	.92	.90	.89	.86
2.0	.96	.91	.86	.94	.89	.85	.91	.86	.83	.87	.84	.81	.84	.81	.79	.77
3.0	.87	.81	.76	.86	.80	.75	.83	.78	.73	.80	.75	.72	.77	.73	.70	.68
4.0	.80	.73	.67	.79	.72	.67	.76	.70	.66	.73	.69	.65	.71	.67	.64	.62
5.0	.73	.66	.61	.72	.65	.60	.70	.64	.59	.68	.63	.59	.66	.61	.58	.56
6.0	.68	.60	.55	.67	.60	.55	.65	.59	.54	.63	.58	.54	.61	.57	.53	.51
7.0	.63	.56	.50	.62	.55	.50	.60	.54	.50	.59	.53	.49	.57	.52	.49	.47
8.0	.59	.51	.46	.58	.51	.46	.56	.50	.46	.55	.49	.45	.54	.49	.45	.43
9.0	.55	.48	.43	.54	.47	.43	.53	.47	.42	.52	.46	.42	.51	.46	.42	.40
10.0	.51	.44	.40	.51	.44	.40	.50	.44	.40	.49	.43	.39	.48	.43	.39	.38

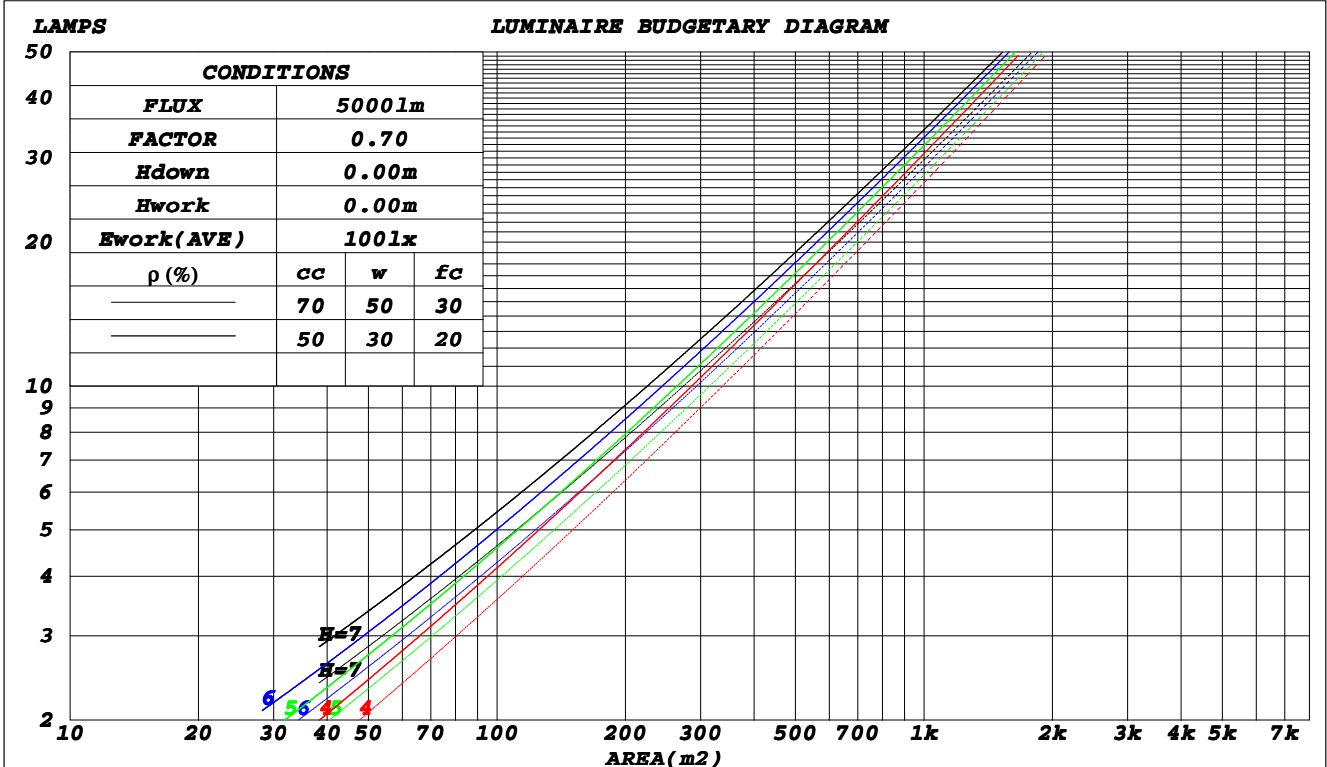

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-03-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks: 电源: LF-GSD060YC+HCD038/BT+HIR07
 灯板: H6060-N-10S38P-V6.0(A、B)
 灯珠: 鸿利0.2W高光效

WEC AND CCEC

Test:U:221.40V I:0.1720A P:36.000W PF:0.9410 Freq:50.00Hz		
Lamp Flux:4244.6x1 lm		
NAME: H6060-N 36W BTPIR 4000K	TYPE: 矩形	
MFR.:	DIM.: 596*596*12 (mm)	
	SUR.: 504*456 (mm)	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.242	.138	.044	.235	.134	.043	.220	.126	.040	.207	.120	.038	.195	.113	.036	
2.0	.229	.125	.038	.222	.122	.038	.210	.117	.036	.198	.111	.035	.188	.106	.033	
3.0	.214	.114	.034	.208	.111	.034	.197	.107	.032	.187	.102	.031	.178	.098	.030	
4.0	.200	.104	.030	.195	.102	.030	.185	.098	.029	.176	.094	.028	.168	.091	.028	
5.0	.187	.095	.028	.182	.094	.027	.174	.090	.027	.166	.087	.026	.158	.085	.025	
6.0	.175	.088	.025	.171	.086	.025	.164	.084	.024	.156	.081	.024	.150	.079	.023	
7.0	.165	.081	.023	.161	.080	.023	.154	.078	.022	.148	.076	.022	.142	.074	.022	
8.0	.156	.076	.021	.152	.075	.021	.146	.073	.021	.140	.071	.021	.135	.069	.020	
9.0	.147	.071	.020	.144	.070	.020	.139	.069	.019	.133	.067	.019	.128	.065	.019	
10.0	.140	.067	.019	.137	.066	.018	.132	.065	.018	.127	.063	.018	.123	.062	.018	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.210	.210	.210	.180	.180	.180	.123	.123	.123	.070	.070	.070	.023	.023	.023	
1.0	.196	.177	.160	.167	.152	.137	.114	.104	.095	.066	.060	.055	.021	.019	.018	
2.0	.184	.152	.126	.158	.131	.109	.108	.091	.076	.062	.053	.044	.020	.017	.014	
3.0	.174	.134	.102	.149	.116	.089	.102	.080	.062	.059	.047	.037	.019	.015	.012	
4.0	.165	.120	.086	.141	.104	.075	.097	.072	.053	.056	.042	.031	.018	.014	.010	
5.0	.157	.109	.074	.135	.094	.064	.093	.066	.045	.054	.039	.027	.017	.013	.009	
6.0	.150	.100	.065	.129	.087	.057	.089	.061	.040	.051	.036	.024	.017	.012	.008	
7.0	.143	.093	.058	.123	.081	.051	.085	.057	.036	.049	.033	.021	.016	.011	.007	
8.0	.137	.087	.053	.118	.076	.046	.082	.053	.033	.047	.031	.020	.015	.010	.006	
9.0	.131	.082	.049	.113	.071	.043	.078	.050	.030	.046	.030	.018	.015	.010	.006	
10.0	.126	.078	.046	.109	.068	.040	.076	.048	.028	.044	.028	.017	.014	.009	.006	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-03-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: 电源: LF-GSD060YC+HCD038/BT+HIR07
 灯板: H6060-N-10S38P-V6.0(A、B)
 灯珠: 鸿利0.2W高光效

UGR(Unified Glare Rating) Table

Test:U:221.40V I:0.1720A P:36.000W PF:0.9410 Freq:50.00Hz		
Lamp Flux:4244.6x1 lm		
NAME: H6060-N 36W BTPIR 4000K	TYPE: 矩形	
MFR.:	DIM.: 596*596*12 (mm)	
	SUR.: 504*456 (mm)	

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.2	16.4	15.5	16.6	16.8	14.6	15.8	14.9	16.0	16.2
3H	16.5	17.6	16.8	17.8	18.1	15.8	16.9	16.1	17.2	17.5
4H	16.9	18.0	17.3	18.3	18.6	16.3	17.3	16.6	17.6	17.9
6H	17.3	18.2	17.6	18.5	18.9	16.5	17.5	16.9	17.8	18.1
8H	17.4	18.3	17.7	18.6	18.9	16.6	17.5	16.9	17.8	18.2
12H	17.4	18.3	17.8	18.6	19.0	16.6	17.5	17.0	17.8	18.2
4H 2H	15.7	16.7	16.0	17.0	17.3	15.2	16.2	15.5	16.5	16.8
3H	17.1	18.1	17.5	18.4	18.7	16.6	17.5	17.0	17.8	18.2
4H	17.7	18.6	18.1	18.9	19.3	17.1	18.0	17.5	18.3	18.7
6H	18.2	18.9	18.6	19.3	19.7	17.5	18.2	17.9	18.6	19.0
8H	18.3	19.0	18.7	19.4	19.8	17.6	18.3	18.0	18.7	19.1
12H	18.4	19.0	18.9	19.5	19.9	17.6	18.3	18.1	18.7	19.1
8H 4H	17.9	18.6	18.4	19.0	19.4	17.4	18.0	17.8	18.4	18.9
6H	18.5	19.0	18.9	19.5	19.9	17.8	18.4	18.3	18.8	19.3
8H	18.7	19.2	19.2	19.6	20.1	18.0	18.5	18.5	19.0	19.5
12H	18.9	19.3	19.4	19.8	20.3	18.1	18.5	18.6	19.0	19.6
12H 4H	17.9	18.5	18.4	18.9	19.4	17.4	18.0	17.8	18.4	18.9
6H	18.5	19.0	19.0	19.4	20.0	17.9	18.4	18.4	18.8	19.3
8H	18.7	19.2	19.3	19.7	20.2	18.1	18.5	18.6	19.0	19.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.4 / - 0.3					+ 0.2 / - 0.2				
1.5H	+ 0.7 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117, 4245 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 5.0)
 Area: 0.23 m2

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-03-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: 电源: LF-GSD060YC+HCD038/BT+HIR07
 灯板: H6060-N-10S38P-V6.0(A、B)
 灯珠: 鸿利0.2W高光效

UTILIZATION FACTORS TABLE

Test:U:221.40V I:0.1720A P:36.000W PF:0.9410 Freq:50.00Hz Lamp Flux:4244.6x1 lm		
NAME: H6060-N 36W BTPIR 4000K	TYPE: 矩形	
MFR.:	DIM.: 596*596*12 (mm)	
	SUR.: 504*456 (mm)	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	73	64	59	72	64	58	71	63	58	53
0.80	81	73	67	80	72	67	79	71	66	61
1.00	87	79	74	86	78	73	84	79	73	67
1.25	93	85	80	91	84	79	89	83	78	72
1.50	97	89	84	95	88	83	92	86	82	76
2.00	101	95	90	99	94	89	96	91	87	80
2.50	104	98	94	102	97	93	98	94	90	83
3.00	106	101	97	104	100	96	100	96	93	85
4.00	109	105	102	107	103	100	103	100	97	88
5.00	111	108	105	109	106	103	104	102	100	90
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2021-03-26

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: 电源: LF-GSD060YC+HCD038/BT+HIR07
灯板: H6060-N-10S38P-V6.0(A、B)
灯珠: 鸿利0.2W高光效

ISOCANDELA DIAGRAM

Test:U:221.40V I:0.1720A P:36.000W PF:0.9410 Freq:50.00Hz Lamp Flux:4244.6x1 lm		
NAME: H6060-N 36W BTPIR 4000K	TYPE: 矩形	
MFR.:	DIM.: 596*596*12 (mm)	
	SUR.: 504*456 (mm)	

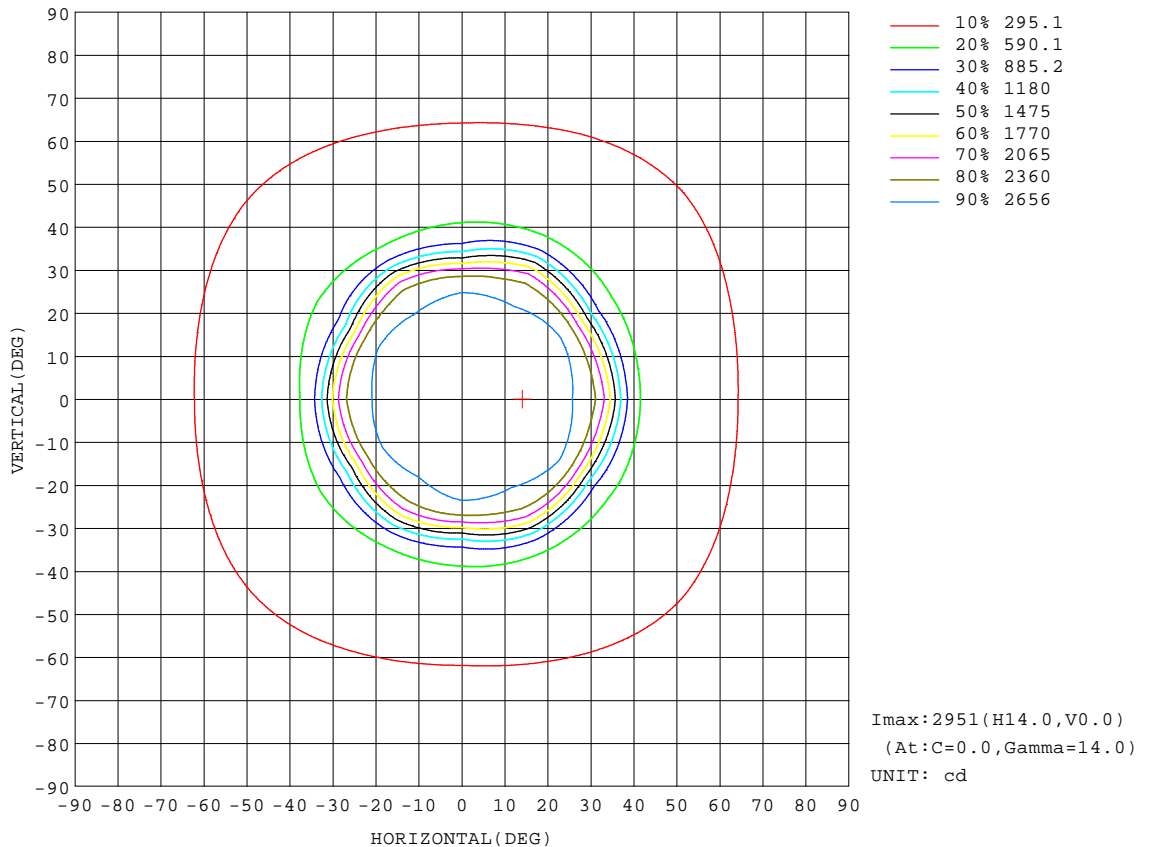


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-03-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GSD060YC+HCD038/BT+HIR07
灯板: H6060-N-10S38P-V6.0(A、B)
灯珠: 鸿利0.2W高光效

AAI Figure

Test:U:221.40V I:0.1720A P:36.000W PF:0.9410 Freq:50.00Hz		
Lamp Flux:4244.6x1 lm		
NAME: H6060-N 36W BTPIR 4000K	TYPE: 矩形	
MFR.:	DIM.: 596*596*12 (mm)	
	SUR.: 504*456 (mm)	

Flux out:2523 lm

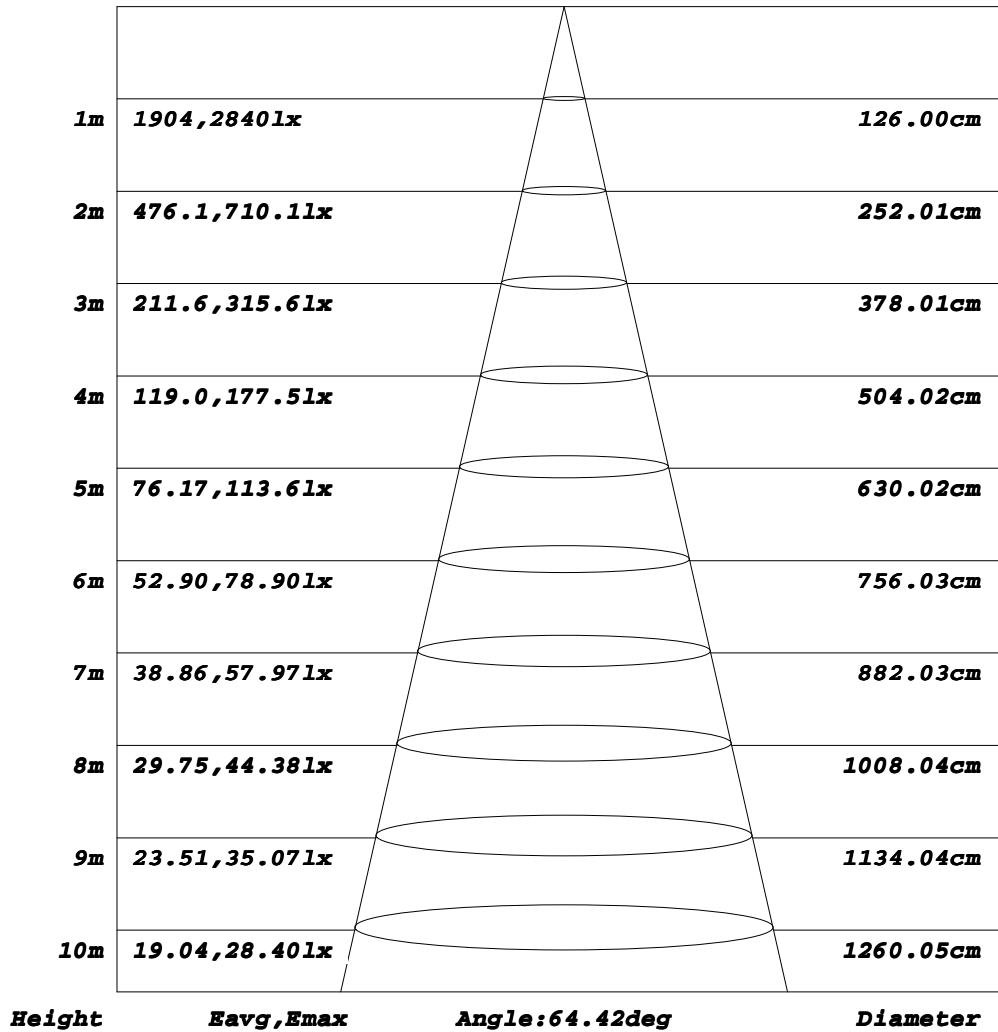


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-03-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GSD060YC+HCD038/BT+HIR07
灯板: H6060-N-10S38P-V6.0(A、B)
灯珠: 鸿利0.2W高光效

ISOLUX DIAGRAM


Test:U:221.40V I:0.1720A P:36.000W PF:0.9410 Freq:50.00Hz		
Lamp Flux:4244.6x1 lm		
NAME: H6060-N 36W BTPIR 4000K	TYPE: 矩形	
MFR.:	DIM.: 596*596*12 (mm)	
	SUR.: 504*456 (mm)	

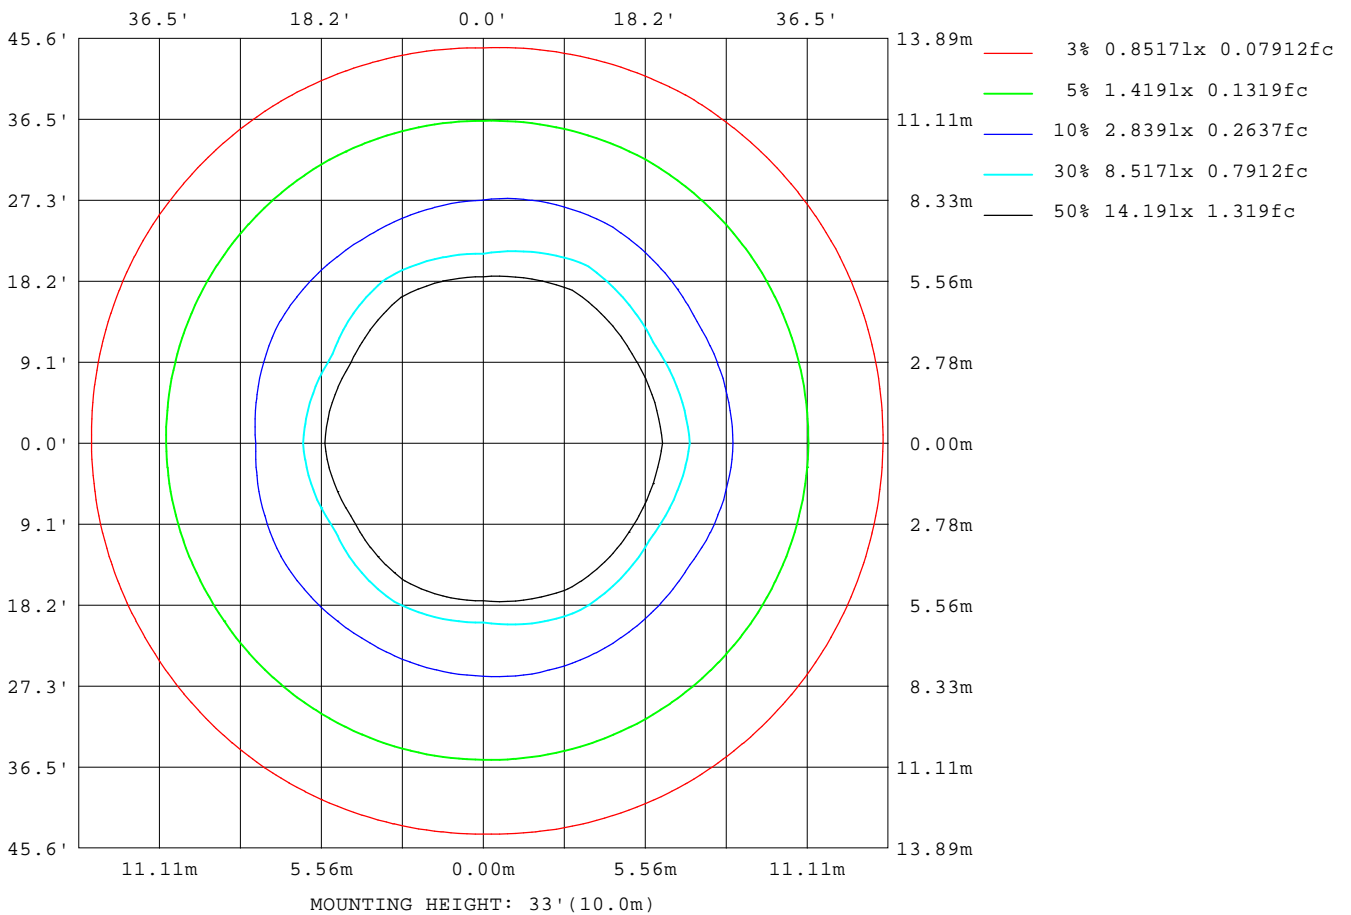

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-03-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GSD060YC+HCD038/BT+HIR07
灯板: H6060-N-10S38P-V6.0(A、B)
灯珠: 鸿利0.2W高光效

Planar Illuminance Curve

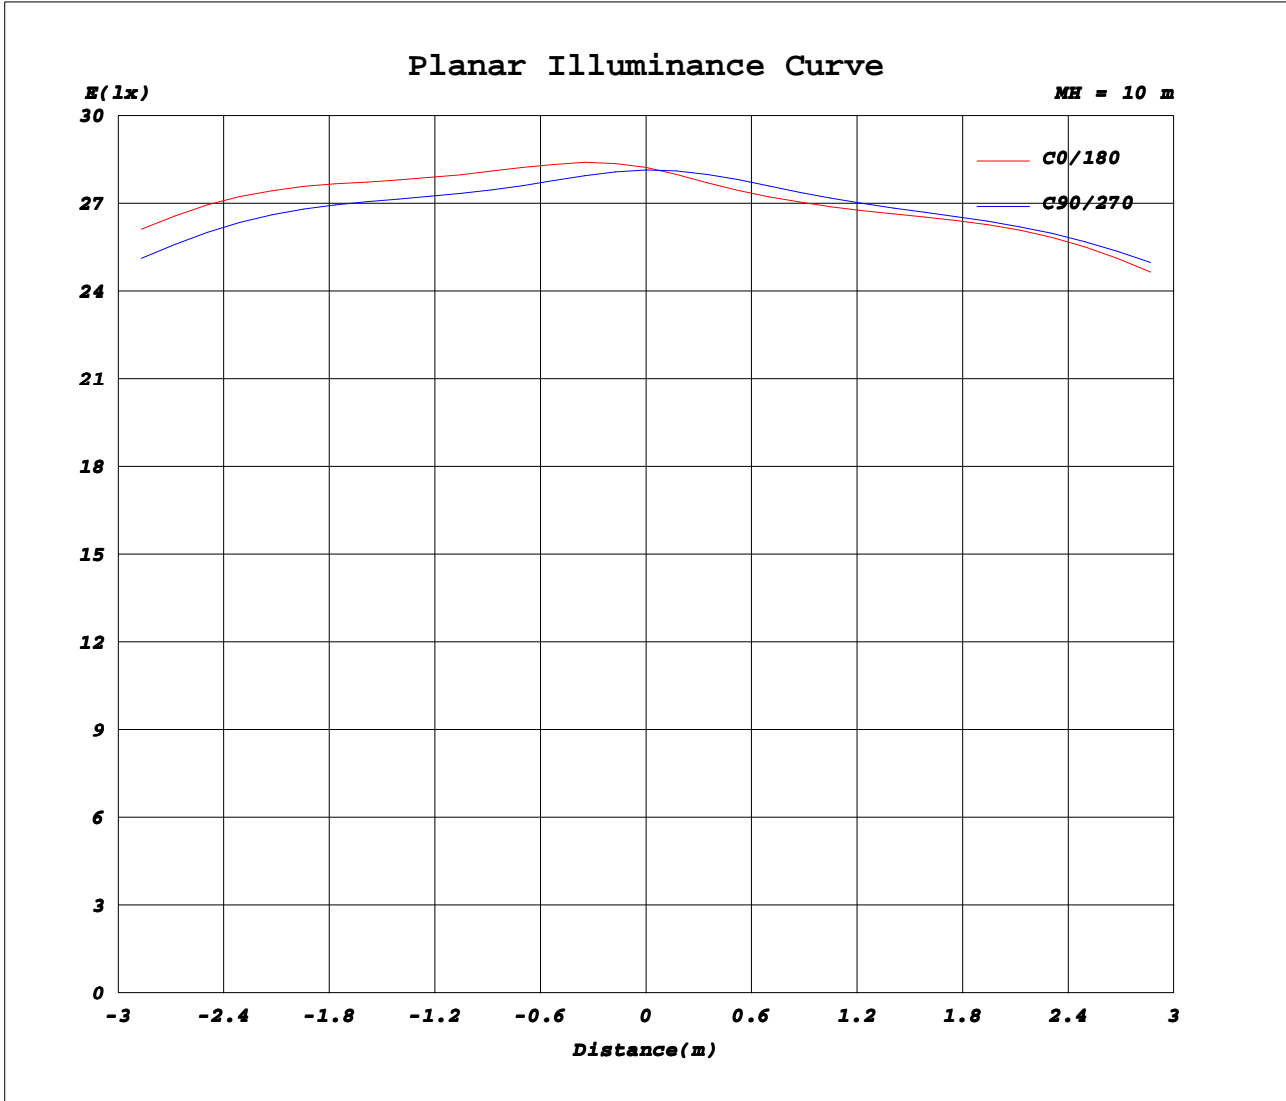

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-03-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GSD060YC+HCD038/BT+HIR07
灯板: H6060-N-10S38P-V6.0(A、B)
灯珠: 鸿利0.2W高光效

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.40V I:0.1720A P:36.000W PF:0.9410 Freq:50.00Hz Lamp Flux:4244.6x1 lm		
NAME: H6060-N 36W BTPIR 4000K	TYPE: 矩形	
MFR.:	DIM.: 596*596*12 (mm)	
	SUR.: 504*456 (mm)	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	2823	2818	2820	2815	2808	2806	2823	2818	2820	2815	2808	2806							
5	2843	2832	2808	2779	2749	2727	2736	2732	2744	2770	2804	2819							
10	2898	2891	2864	2822	2793	2752	2766	2751	2758	2780	2815	2864							
15	2948	2939	2876	2840	2797	2758	2788	2767	2792	2815	2872	2924							
20	2856	2847	2764	2747	2675	2684	2683	2701	2725	2760	2797	2850							
25	2683	2708	2599	2577	2489	2429	2508	2536	2576	2649	2641	2723							
30	2455	2289	2204	1733	1821	1440	1794	1573	2164	2121	2399	2369							
35	1647	1094	1149	802	842	731	785	761	1072	1056	1607	1293							
40	694	596	575	560	535	557	541	586	571	620	720	638							
45	513	506	492	483	475	475	484	496	500	510	517	520							
50	457	449	443	430	429	425	435	441	450	444	464	461							
55	406	403	397	381	385	381	384	397	399	394	413	414							
60	351	354	341	321	324	326	324	343	345	348	360	367							
65	284	285	267	253	250	254	258	274	278	284	296	301							
70	210	209	196	183	179	182	184	200	207	210	222	222							
75	141	141	128	116	113	119	120	134	140	144	152	155							
80	79.6	83.6	72.1	64.2	61.7	65.9	65.0	78.6	86.4	87.3	96.5	94.3							
85	37.9	40.9	33.3	28.0	26.0	27.9	30.4	37.9	44.3	45.8	52.4	50.5							
90	10.9	9.70	7.88	7.24	8.02	7.81	10.7	11.2	13.4	15.1	19.4	18.3							
95	7.39	8.34	8.55	7.93	8.63	8.47	11.8	12.0	11.7	11.2	11.7	11.6							
100	8.52	8.83	8.79	8.99	9.13	9.21	12.9	12.7	12.4	12.3	12.0	12.1							
105	9.59	9.63	9.86	10.1	10.3	10.4	14.0	13.7	13.5	13.3	13.2	13.2							
110	10.8	10.8	11.1	11.5	11.7	11.8	15.2	14.9	14.7	14.4	14.3	14.2							
115	12.2	12.4	12.8	13.2	13.5	13.6	16.7	16.4	16.0	15.8	15.5	15.4							
120	14.1	14.3	14.7	15.2	15.6	15.7	18.5	18.2	17.7	17.4	17.0	17.0							
125	16.2	16.4	16.9	17.4	17.9	18.0	20.6	20.3	19.7	19.3	18.8	18.8							
130	18.6	18.8	19.4	19.8	20.2	20.3	22.9	22.6	21.9	21.5	21.0	21.0							
135	20.9	21.0	21.4	21.8	22.0	22.2	24.8	24.5	23.9	23.5	23.0	23.0							
140	22.8	22.8	22.9	23.2	23.2	23.4	26.1	25.8	25.4	25.1	24.7	24.7							
145	23.9	23.8	23.8	24.0	24.0	24.1	26.8	26.5	26.3	26.1	25.7	25.8							
150	24.6	24.4	24.4	24.6	24.6	24.7	27.1	26.8	26.7	26.6	26.4	26.4							
155	25.3	25.0	25.0	25.3	25.2	25.4	27.1	26.9	26.9	26.9	26.6	26.8							
160	26.1	25.7	25.9	26.1	26.1	26.3	27.4	27.1	27.0	27.1	26.9	27.0							
165	26.9	26.8	27.1	27.2	27.2	27.5	28.0	27.8	27.5	27.5	27.5	27.4							
170	28.1	28.0	28.4	28.3	28.3	28.7	28.8	28.8	28.3	28.3	28.3	28.2							
175	29.0	29.0	29.2	29.1	29.1	29.4	29.5	29.5	29.2	29.0	29.2	29.1							
180	29.6	29.6	29.5	29.4	29.5	29.6	29.6	29.6	29.6	29.4	29.5	29.5							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-03-26

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GSD060YC+HCD038/BT+HIR07
灯板: H6060-N-10S38P-V6.0(A、B)
灯珠: 鸿利0.2W高光效