
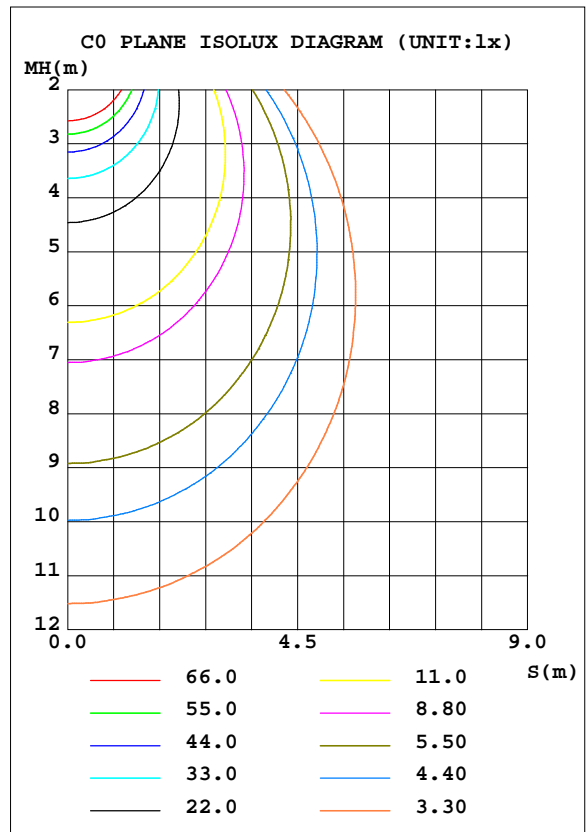


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.80V I:0.0570A P:12.200W PF:0.9670 Freq:50.00Hz		
Lamp Flux:1365.06x1 lm		
NAME: N260 12W 000 4000K	TYPE: 圆柱形	
MFR.:	DIM.: ϕ 260*89 (mm)	
	SUR.: ϕ 260 (mm)	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 111.89 lm/W			
MODEL		I _{max} (cd)	437.8	S/MH(C0/180)	1.26
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1365.1	η UP, DN(C0-180)	2.4, 45.3
NOMINAL FLUX(lm)	1365.06	CIE CLASS	DIRECT	η UP, DN(C180-360)	3.0, 49.3
LAMPS INSIDE	1	η up(%)	5.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220.7	η down(%)	94.7	CIBSE SHR MAX	1.35

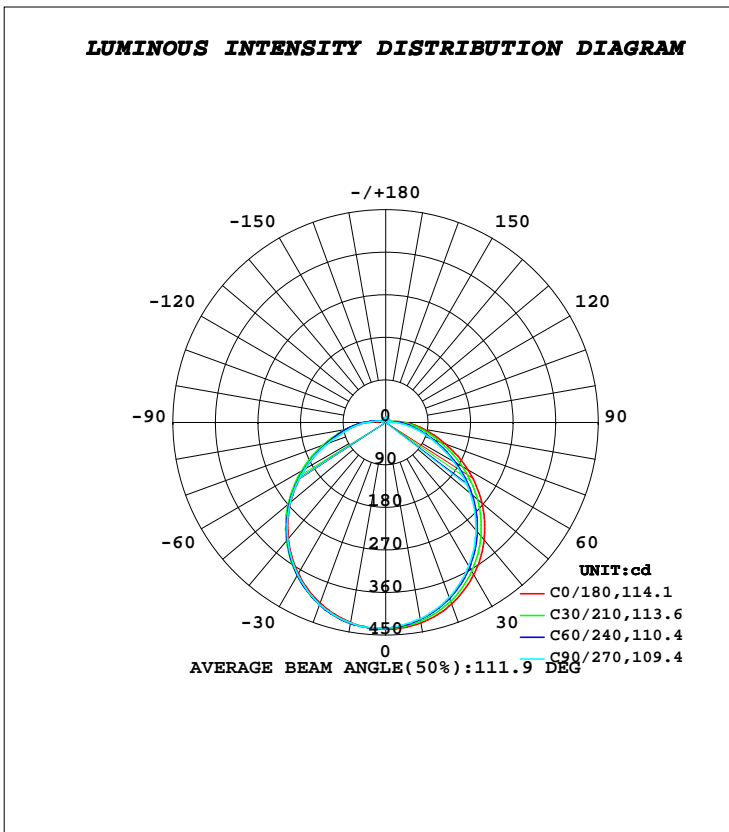

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GIF015YA0350H
灯板: N260-10S11P-V1.4
灯珠: HL-A-2835H431W-S1-08-HR3, 鸿利, 0.

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	430.7	425.0	421.4	421.9	428.9	431.5	430.5	429.3	0- 10	41.16	41.16	3.01,3.01
20	408.8	399.5	393.4	395.2	406.3	410.1	409.8	408.6	10- 20	117.7	158.9	11.6,11.6
30	372.1	359.3	351.3	354.7	369.5	374.3	372.2	372.8	20- 30	178.0	336.9	24.7,24.7
40	324.3	307.8	297.3	302.4	321.0	325.7	322.9	324.2	30- 40	213.8	550.7	40.3,40.3
50	266.1	246.5	234.1	241.2	263.2	268.1	263.8	266.5	40- 50	221.1	771.8	56.5,56.5
60	201.4	179.7	165.7	174.7	197.4	202.8	198.2	201.7	50- 60	199.7	971.5	71.2,71.2
70	135.5	116.0	103.2	112.0	132.3	138.4	130.8	137.4	60- 70	155.8	1127	82.6,82.6
80	81.16	67.23	54.15	63.81	79.39	86.41	77.43	85.71	70- 80	104.4	1232	90.2,90.2
90	41.29	33.72	21.13	31.09	39.64	46.90	41.63	47.14	80- 90	60.55	1292	94.7,94.7
100	12.23	12.77	6.987	11.49	12.05	19.81	17.92	20.57	90-100	27.92	1320	96.7,96.7
110	6.748	6.970	6.316	6.670	7.558	7.444	7.156	7.741	100-110	10.40	1331	97.5,97.5
120	7.367	7.260	7.173	7.172	8.247	7.537	7.351	7.505	110-120	7.082	1338	98,98
130	8.132	7.982	7.881	7.879	8.816	8.197	8.029	8.134	120-130	6.958	1345	98.5,98.5
140	8.730	8.637	8.529	8.583	9.232	8.790	8.605	8.779	130-140	6.512	1351	99,99
150	9.395	9.295	9.306	9.194	9.675	9.335	9.202	9.346	140-150	5.659	1357	99.4,99.4
160	10.08	9.833	10.05	9.746	10.20	9.881	9.882	9.881	150-160	4.441	1361	99.7,99.7
170	10.48	10.30	10.54	10.19	10.56	10.34	10.47	10.24	160-170	2.869	1364	99.9,99.9
180	10.84	10.76	10.80	10.64	10.87	10.76	10.79	10.64	170-180	1.006	1365	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: 电源: LF-GIF015YA0350H
 灯板: N260-10S11P-V1.4
 灯珠: HL-A-2835H431W-S1-08-HR3, 鸿利, 0.

LUMINANCE LIMITATION CURVES

Test:U:220.80V I:0.0570A P:12.200W PF:0.9670 Freq:50.00Hz Lamp Flux:1365.06x1 lm		
NAME: N260 12W 000 4000K	TYPE: 圆柱形	
MFR.:	DIM.: ϕ 260*89 (mm)	
	SUR.: ϕ 260 (mm)	

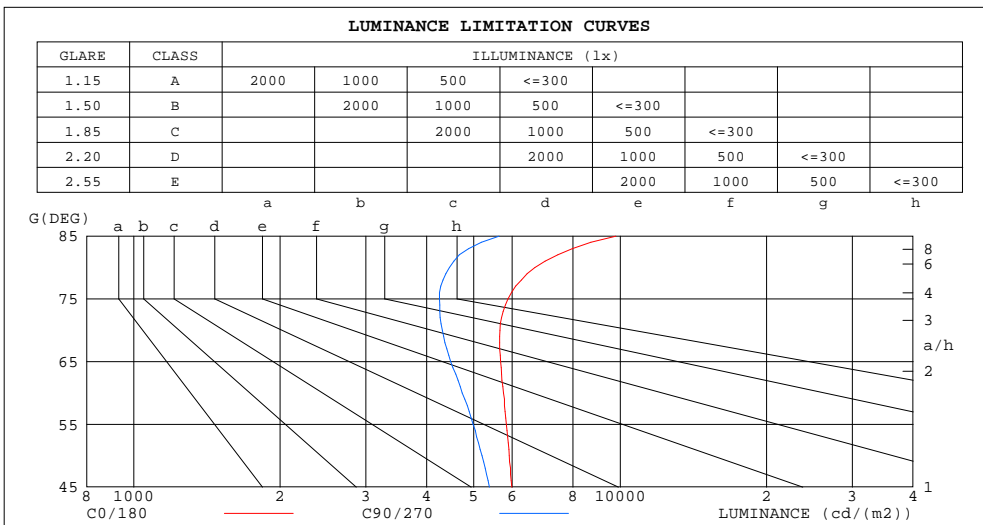

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	9803	5633
80	6677	4455
75	5881	4249
70	5658	4312
65	5680	4484
60	5754	4734
55	5836	4982
50	5913	5202
45	5990	5384


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GIF015YA0350H
灯板: N260-10S11P-V1.4
灯珠: HL-A-2835H431W-S1-08-HR3, 鸿利, 0.

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.80V I:0.0570A P:12.200W PF:0.9670 Freq:50.00Hz Lamp Flux:1365.06x1 lm		
NAME: N260 12W 000 4000K	TYPE: 圆柱形	
MFR.:	DIM.: ϕ 260*89 (mm)	
	SUR.: ϕ 260 (mm)	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.08	1.02	1.02	1.02	.97	.97	.97	.95
1.0	1.01	.96	.92	.98	.94	.90	.93	.89	.86	.88	.85	.83	.84	.81	.79	.77
2.0	.88	.80	.74	.85	.79	.73	.81	.75	.71	.77	.72	.68	.73	.69	.66	.63
3.0	.77	.68	.62	.75	.67	.61	.71	.64	.59	.67	.62	.57	.64	.60	.56	.53
4.0	.68	.59	.52	.66	.58	.51	.63	.56	.50	.60	.54	.49	.57	.52	.48	.45
5.0	.61	.51	.45	.59	.51	.44	.56	.49	.43	.54	.47	.42	.51	.46	.41	.39
6.0	.55	.45	.39	.53	.45	.39	.51	.43	.38	.49	.42	.37	.47	.41	.36	.34
7.0	.49	.41	.34	.48	.40	.34	.46	.39	.33	.44	.38	.33	.43	.37	.32	.30
8.0	.45	.36	.31	.44	.36	.30	.42	.35	.30	.41	.34	.29	.39	.33	.29	.27
9.0	.41	.33	.27	.40	.33	.27	.39	.32	.27	.37	.31	.26	.36	.30	.26	.24
10.0	.38	.30	.25	.37	.30	.25	.36	.29	.24	.35	.28	.24	.34	.28	.24	.22

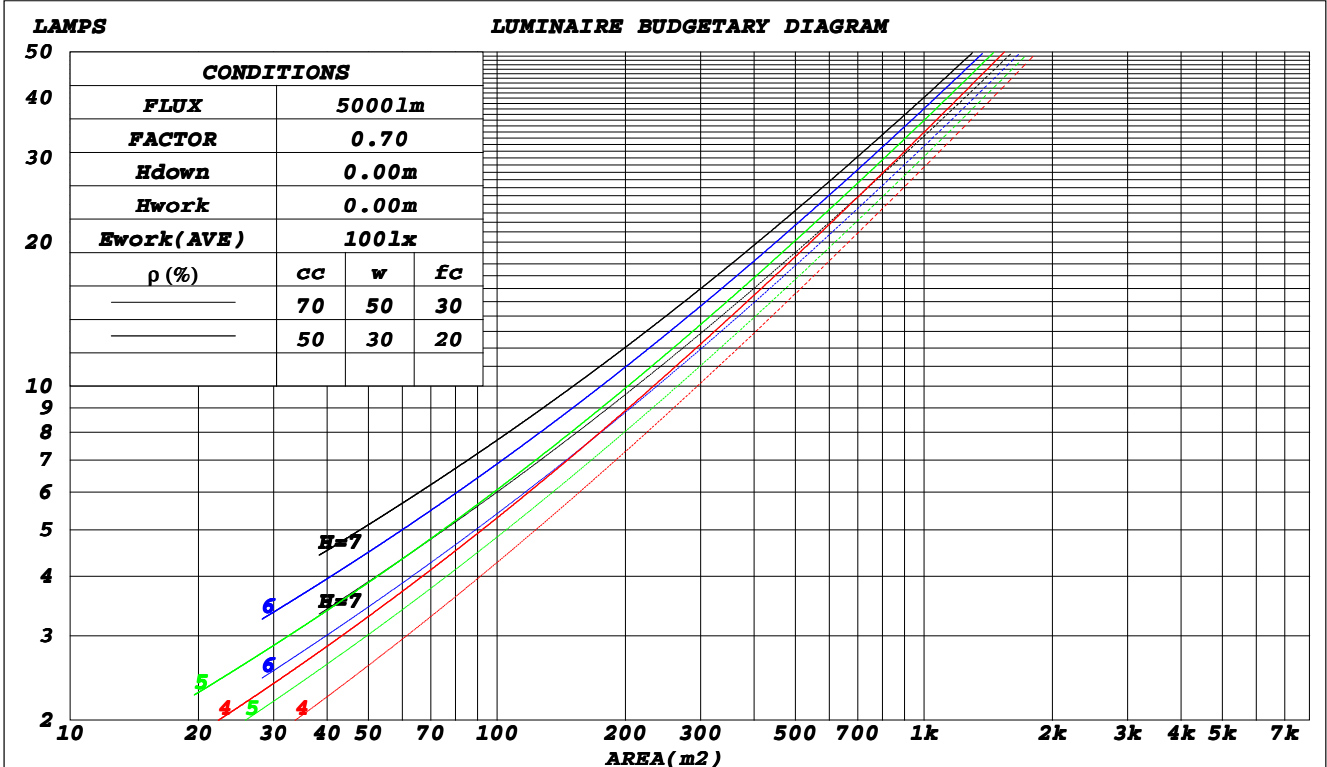

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2021-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks: 电源: LF-GIF015YA0350H
 灯板: N260-10S11P-V1.4
 灯珠: HL-A-2835H431W-S1-08-HR3, 鸿利, 0.

WEC AND CCEC

Test:U:220.80V I:0.0570A P:12.200W PF:0.9670 Freq:50.00Hz		
Lamp Flux:1365.06x1 lm		
NAME: N260 12W 000 4000K	TYPE: 圆柱形	
MFR.:	DIM.: φ260*89 (mm)	
	SUR.: φ260 (mm)	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.339	.193	.061	.330	.188	.060	.313	.180	.057	.298	.172	.055	.284	.165	.053	
2.0	.306	.168	.051	.298	.164	.051	.284	.158	.049	.270	.152	.047	.258	.146	.046	
3.0	.278	.148	.044	.271	.145	.044	.258	.140	.043	.246	.135	.041	.235	.130	.040	
4.0	.254	.132	.039	.248	.130	.038	.236	.125	.037	.226	.121	.037	.215	.117	.036	
5.0	.234	.119	.034	.228	.117	.034	.218	.113	.033	.208	.110	.033	.199	.106	.032	
6.0	.216	.108	.031	.211	.106	.031	.201	.103	.030	.193	.100	.029	.184	.097	.029	
7.0	.200	.099	.028	.196	.097	.028	.187	.095	.027	.179	.092	.027	.172	.089	.026	
8.0	.187	.091	.026	.182	.090	.025	.175	.087	.025	.168	.085	.024	.161	.083	.024	
9.0	.175	.084	.024	.171	.083	.023	.164	.081	.023	.157	.079	.023	.151	.077	.022	
10.0	.164	.079	.022	.161	.078	.022	.154	.076	.021	.148	.074	.021	.142	.072	.021	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.231	.231	.231	.198	.198	.198	.135	.135	.135	.077	.077	.077	.025	.025	.025	
1.0	.223	.197	.173	.191	.169	.149	.131	.116	.103	.075	.067	.060	.024	.022	.019	
2.0	.215	.173	.138	.185	.149	.119	.126	.103	.083	.073	.060	.049	.023	.019	.016	
3.0	.208	.156	.115	.178	.134	.099	.122	.093	.070	.071	.055	.041	.023	.018	.013	
4.0	.200	.143	.099	.171	.123	.086	.118	.086	.061	.068	.050	.036	.022	.016	.012	
5.0	.192	.133	.089	.165	.115	.077	.114	.080	.054	.066	.047	.032	.021	.015	.011	
6.0	.185	.124	.081	.159	.108	.070	.110	.075	.050	.064	.044	.030	.021	.014	.010	
7.0	.178	.117	.075	.153	.102	.065	.106	.071	.046	.061	.042	.028	.020	.014	.009	
8.0	.171	.112	.071	.148	.097	.062	.102	.068	.044	.059	.040	.026	.019	.013	.009	
9.0	.165	.107	.067	.142	.093	.059	.099	.065	.042	.057	.038	.025	.019	.013	.008	
10.0	.160	.103	.065	.138	.089	.056	.095	.063	.040	.056	.037	.024	.018	.012	.008	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2021-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: 电源: LF-GIF015YA0350H
 灯板: N260-10S11P-V1.4
 灯珠: HL-A-2835H431W-S1-08-HR3, 鸿利, 0.

UGR(Unified Glare Rating) Table

Test:U:220.80V I:0.0570A P:12.200W PF:0.9670 Freq:50.00Hz										
Lamp Flux:1365.06x1 lm										
NAME: N260 12W 000 4000K					TYPE: 圆柱形					
MFR.:					DIM.: ϕ 260*89 (mm)					
					SUR.: ϕ 260 (mm)					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.7	19.2	18.1	19.7	20.1	16.7	18.3	17.2	18.7	19.1
3H	19.7	21.1	20.2	21.5	22.0	18.5	19.9	18.9	20.3	20.8
4H	20.6	22.0	21.1	22.4	22.9	19.2	20.5	19.7	21.0	21.5
6H	21.5	22.8	22.0	23.2	23.7	19.8	21.1	20.3	21.5	22.1
8H	22.0	23.1	22.5	23.6	24.2	20.1	21.3	20.6	21.8	22.3
12H	22.4	23.6	23.0	24.1	24.6	20.4	21.5	20.9	22.0	22.6
4H 2H	18.2	19.5	18.7	20.0	20.5	17.4	18.7	17.9	19.2	19.7
3H	20.5	21.6	21.0	22.1	22.6	19.4	20.5	19.8	21.0	21.5
4H	21.6	22.6	22.1	23.1	23.7	20.2	21.3	20.7	21.8	22.3
6H	22.7	23.6	23.2	24.1	24.7	21.0	22.0	21.6	22.5	23.1
8H	23.2	24.1	23.8	24.6	25.2	21.4	22.3	22.0	22.8	23.4
12H	23.8	24.6	24.4	25.2	25.8	21.8	22.6	22.3	23.1	23.7
8H 4H	21.9	22.7	22.4	23.3	23.9	20.7	21.5	21.2	22.1	22.7
6H	23.2	23.9	23.8	24.5	25.1	21.7	22.4	22.3	23.0	23.6
8H	23.9	24.6	24.5	25.1	25.8	22.2	22.8	22.8	23.4	24.0
12H	24.7	25.3	25.3	25.9	26.6	22.7	23.3	23.3	23.9	24.5
12H 4H	21.9	22.7	22.5	23.3	23.9	20.8	21.6	21.4	22.1	22.7
6H	23.3	24.0	23.9	24.5	25.2	21.9	22.5	22.5	23.1	23.7
8H	24.1	24.7	24.7	25.3	25.9	22.5	23.0	23.0	23.6	24.3
CIE190: 2010										

CIE190: 2010
Area: 0.07 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GIF015YA0350H
灯板: N260-10S11P-V1.4
灯珠: HL-A-2835H431W-S1-08-HR3, 鸿利, 0.

UTILIZATION FACTORS TABLE

Test:U:220.80V I:0.0570A P:12.200W PF:0.9670 Freq:50.00Hz Lamp Flux:1365.06x1 lm		
NAME: N260 12W 000 4000K	TYPE: 圆柱形	
MFR.:	DIM.: $\phi 260 \times 89$ (mm)	
	SUR.: $\phi 260$ (mm)	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	55	43	36	54	43	36	53	42	36	29
0.80	65	53	45	63	52	45	61	51	44	37
1.00	73	61	54	71	60	53	69	62	52	45
1.25	80	69	61	78	68	61	75	66	59	51
1.50	85	74	67	83	73	66	79	71	65	56
2.00	92	82	75	89	81	74	85	78	72	63
2.50	96	87	80	93	85	79	89	82	77	67
3.00	99	91	85	96	89	84	92	86	81	71
4.00	103	97	91	100	95	90	95	90	86	76
5.00	106	100	95	103	98	94	97	93	90	79
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNM = 1.25			

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GIF015YA0350H
灯板: N260-10S11P-V1.4
灯珠: HL-A-2835H431W-S1-08-HR3, 鸿利, 0.

ISOCANDELA DIAGRAM

Test:U:220.80V I:0.0570A P:12.200W PF:0.9670 Freq:50.00Hz		
Lamp Flux:1365.06x1 lm		
NAME: N260 12W 000 4000K	TYPE: 圆柱形	
MFR.:	DIM.: $\phi 260 \times 89$ (mm)	
	SUR.: $\phi 260$ (mm)	

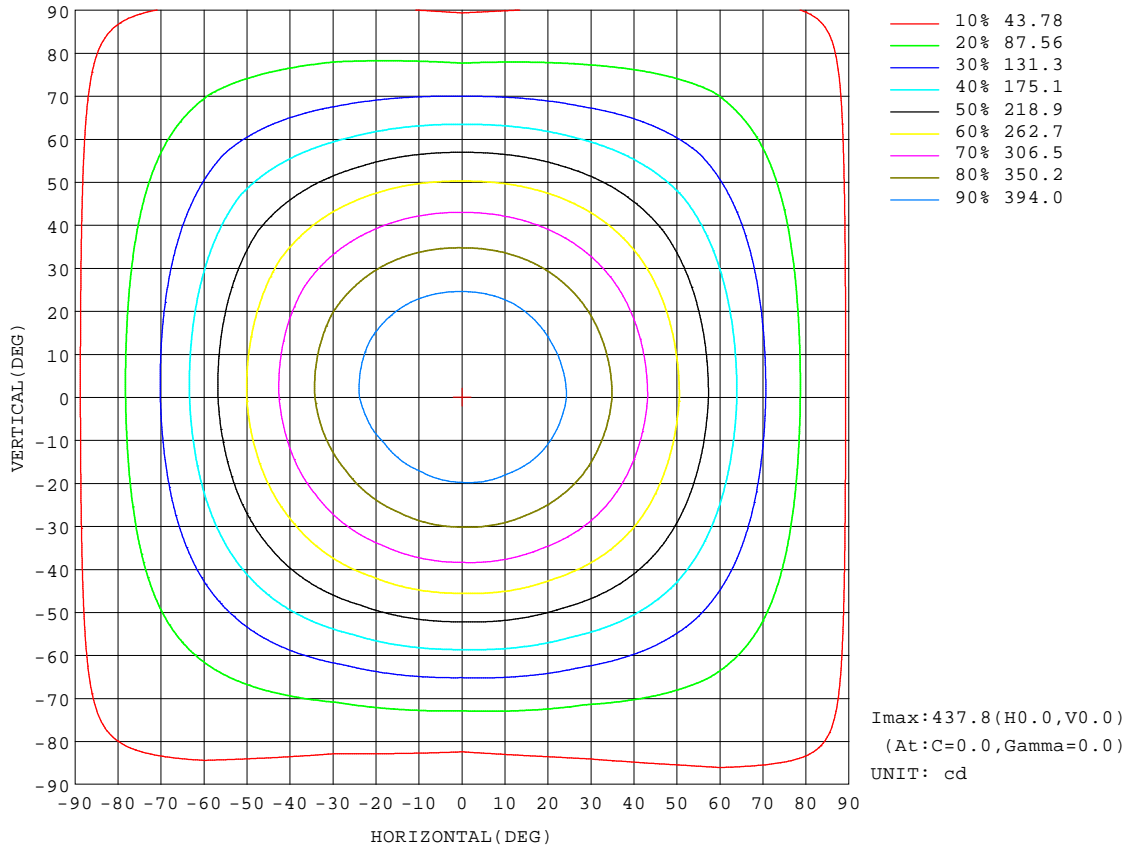


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GIF015YA0350H
灯板: N260-10S11P-V1.4
灯珠: HL-A-2835H431W-S1-08-HR3, 鸿利, 0.

AAI Figure

Test:U:220.80V I:0.0570A P:12.200W PF:0.9670 Freq:50.00Hz Lamp Flux:1365.06x1 lm		
NAME: N260 12W 000 4000K	TYPE: 圆柱形	
MFR.:	DIM.: ϕ 260*89 (mm)	
	SUR.: ϕ 260 (mm)	

Flux out:876.0 lm

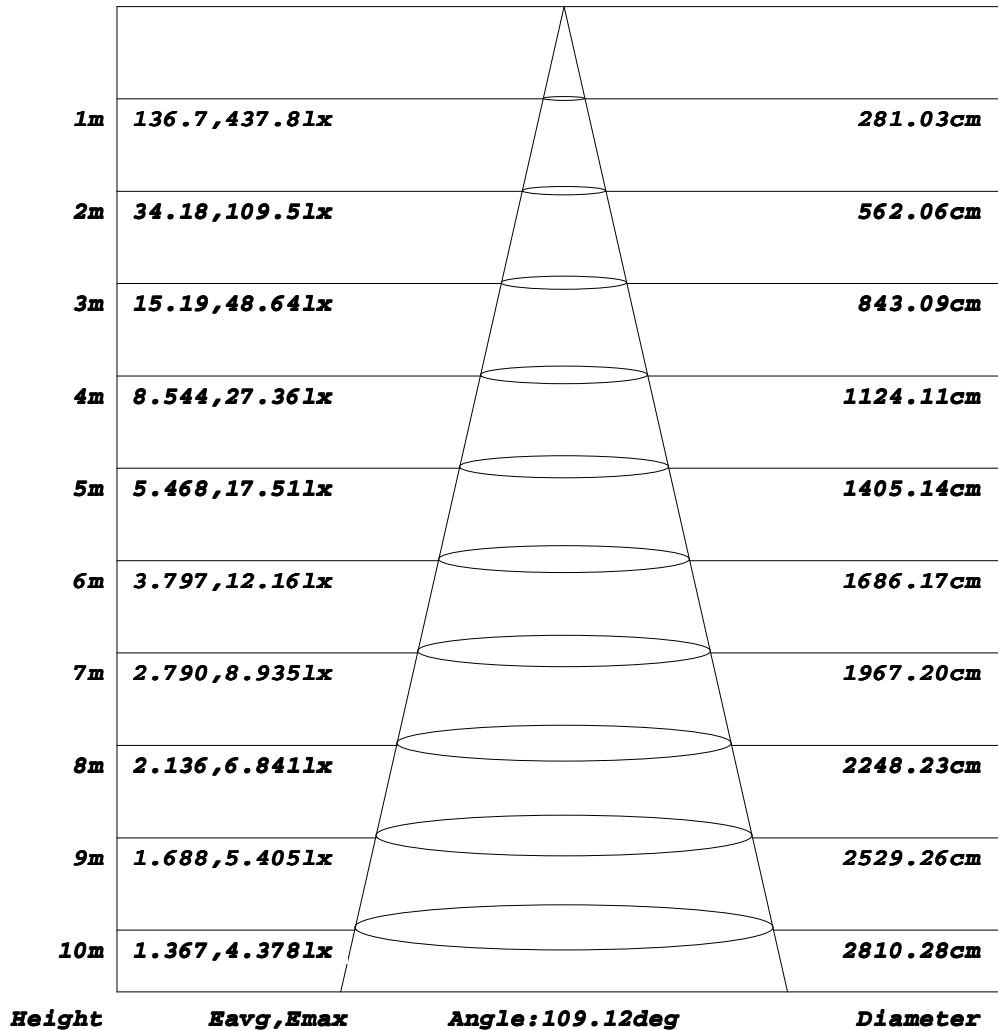


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GIF015YA0350H
灯板: N260-10S11P-V1.4
灯珠: HL-A-2835H431W-S1-08-HR3, 鸿利, 0.

ISOLUX DIAGRAM


Test:U:220.80V I:0.0570A P:12.200W PF:0.9670 Freq:50.00Hz		
Lamp Flux:1365.06x1 lm		
NAME: N260 12W 000 4000K	TYPE: 圆柱形	
MFR.:	DIM.: ϕ 260*89 (mm)	
	SUR.: ϕ 260 (mm)	

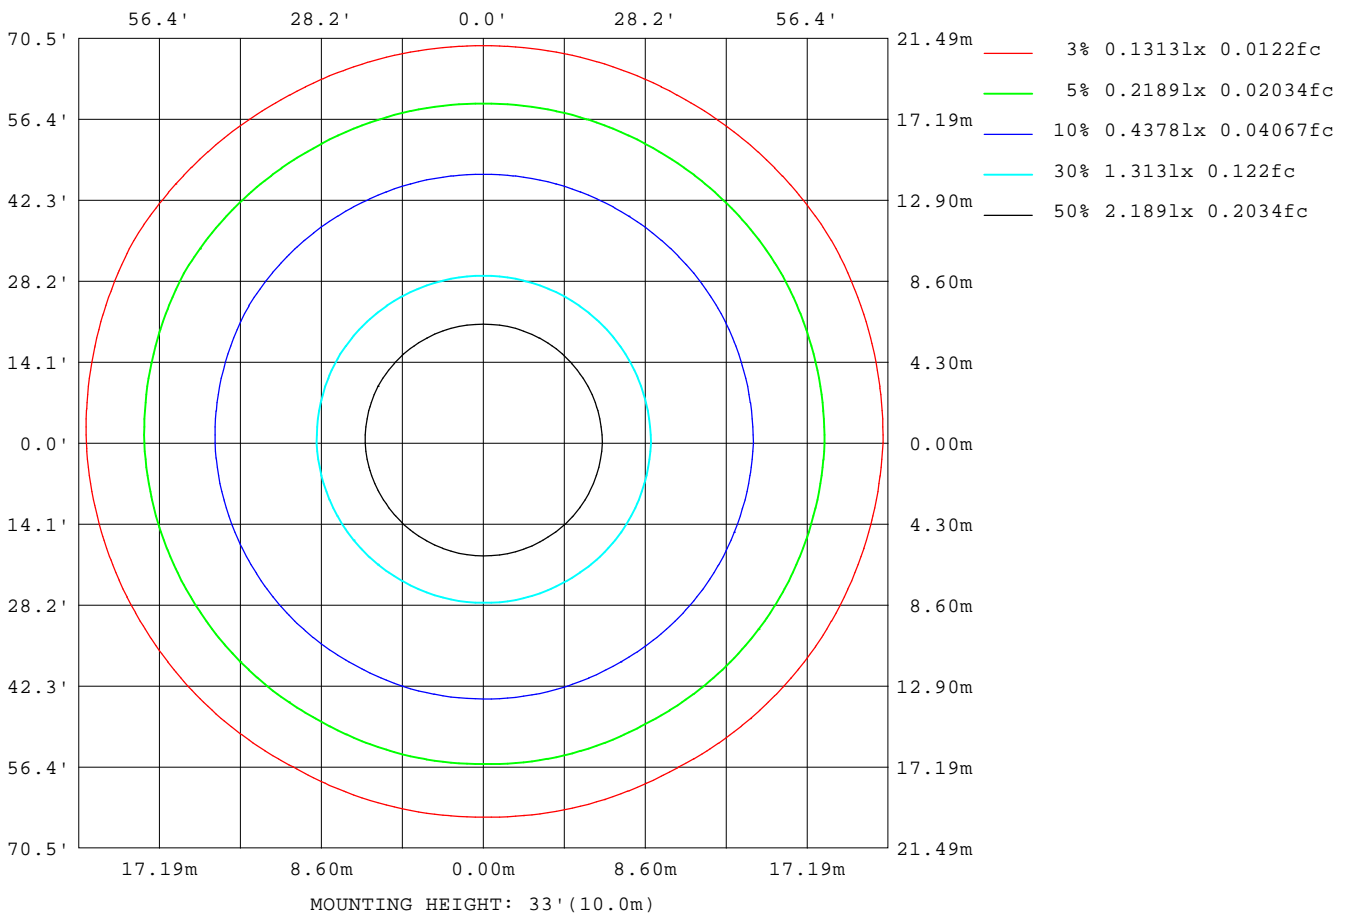

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GIF015YA0350H
灯板: N260-10S11P-V1.4
灯珠: HL-A-2835H431W-S1-08-HR3, 鸿利, 0.

Planar Illuminance Curve

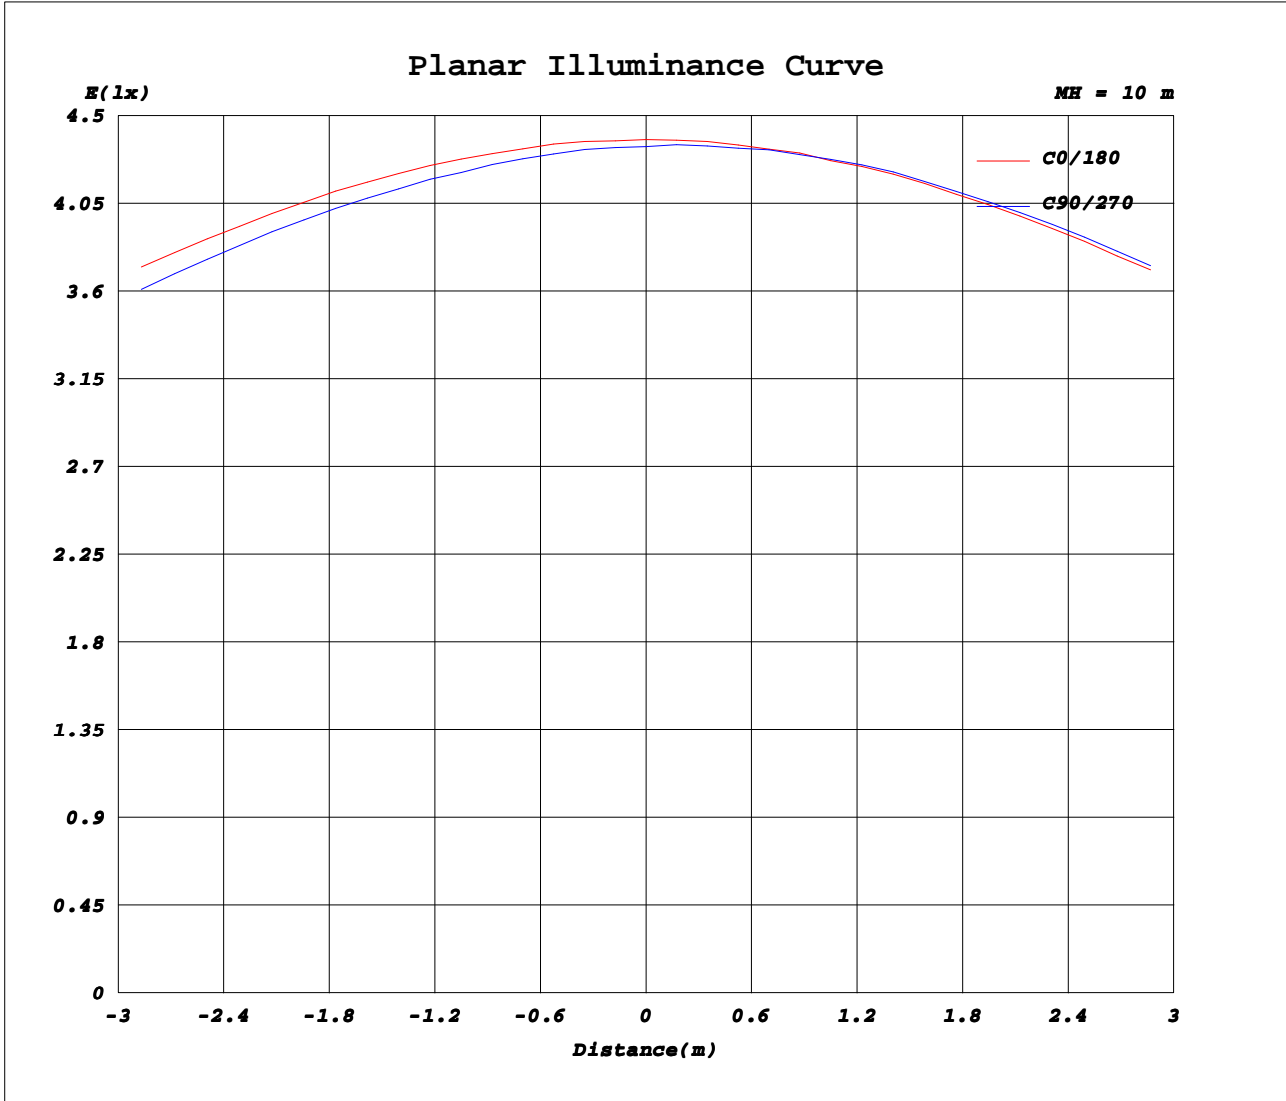

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-06-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GIF015YA0350H
灯板: N260-10S11P-V1.4
灯珠: HL-A-2835H431W-S1-08-HR3, 鸿利, 0.

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.80V I:0.0570A P:12.200W PF:0.9670 Freq:50.00Hz Lamp Flux:1365.06x1 lm		
NAME: N260 12W 000 4000K	TYPE: 圆柱形	
MFR.:	DIM.: ϕ 260*89 (mm)	
	SUR.: ϕ 260 (mm)	

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	438	436	435	434	433	433	438	436	435	434	433	433							
5	436	434	431	430	429	430	436	435	435	435	434	432							
10	431	427	423	421	421	423	429	431	432	431	431	428							
15	421	417	411	409	409	411	420	422	423	422	422	420							
20	409	403	396	393	393	397	406	410	410	410	410	407							
25	392	385	377	374	374	379	389	394	394	392	393	392							
30	372	364	355	351	352	358	369	375	374	372	373	373							
35	350	340	330	326	326	334	346	352	351	349	350	350							
40	324	314	302	297	298	307	321	327	325	323	324	324							
45	296	285	272	267	268	278	293	299	296	295	295	296							
50	266	254	239	234	235	247	263	270	267	264	266	267							
55	234	221	206	200	202	215	230	239	233	231	233	236							
60	201	188	172	166	168	181	197	206	200	198	200	204							
65	168	155	138	133	135	149	164	174	166	164	166	173							
70	135	124	108	103	105	119	132	142	135	131	133	142							
75	107	97.1	81.8	77.0	79.5	92.5	104	113	108	99.9	106	113							
80	81.2	74.3	60.2	54.2	57.2	70.4	79.4	87.3	85.5	77.4	83.1	88.3							
85	59.8	54.4	43.4	34.4	40.3	51.4	57.7	65.1	65.2	58.1	63.4	66.5							
90	41.3	37.5	29.9	21.1	27.0	35.1	39.6	46.2	47.6	41.6	46.4	47.9							
95	26.5	24.0	19.2	12.1	17.1	22.1	24.5	30.4	32.7	28.1	32.1	32.3							
100	12.2	14.3	11.3	6.99	10.0	12.9	12.1	18.5	21.1	17.9	21.0	20.1							
105	7.54	8.54	6.63	5.87	6.04	7.75	7.90	10.6	13.1	10.8	13.3	11.8							
110	6.75	7.53	6.41	6.32	6.29	7.05	7.56	7.15	7.74	7.16	8.00	7.48							
115	7.14	7.14	6.78	6.76	6.73	6.92	7.91	7.41	7.00	6.98	6.97	7.35							
120	7.37	7.37	7.15	7.17	7.12	7.22	8.25	7.74	7.33	7.35	7.34	7.67							
125	7.52	7.83	7.48	7.55	7.48	7.57	8.55	8.04	7.70	7.69	7.69	7.95							
130	8.13	8.13	7.83	7.88	7.84	7.92	8.82	8.35	8.05	8.03	8.04	8.23							
135	8.45	8.43	8.18	8.22	8.18	8.25	9.04	8.64	8.36	8.32	8.35	8.60							
140	8.73	8.74	8.54	8.53	8.53	8.64	9.23	8.91	8.67	8.60	8.63	8.92							
145	9.01	9.04	8.86	8.88	8.83	8.96	9.44	9.15	9.00	8.88	8.93	9.24							
150	9.40	9.40	9.19	9.31	9.18	9.21	9.68	9.38	9.29	9.20	9.22	9.47							
155	9.75	9.63	9.48	9.71	9.47	9.47	9.92	9.62	9.58	9.55	9.48	9.71							
160	10.1	9.85	9.81	10.1	9.74	9.75	10.2	9.87	9.90	9.88	9.79	9.97							
165	10.4	10.1	10.1	10.3	9.95	10.0	10.4	10.1	10.2	10.2	10.0	10.2							
170	10.5	10.3	10.3	10.5	10.1	10.3	10.6	10.3	10.4	10.5	10.2	10.3							
175	10.7	10.7	10.7	10.8	10.5	10.7	10.9	10.7	10.7	10.7	10.6	10.7							
180	10.8	10.8	10.8	10.8	10.6	10.7	10.9	10.7	10.8	10.8	10.6	10.7							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2021-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 电源: LF-GIF015YA0350H
灯板: N260-10S11P-V1.4
灯珠: HL-A-2835H431W-S1-08-HR3, 鸿利, 0.