






- White
RAL9003
- Grey
RAL7045
- Anthracite
RAL7016
- Black
RAL9005

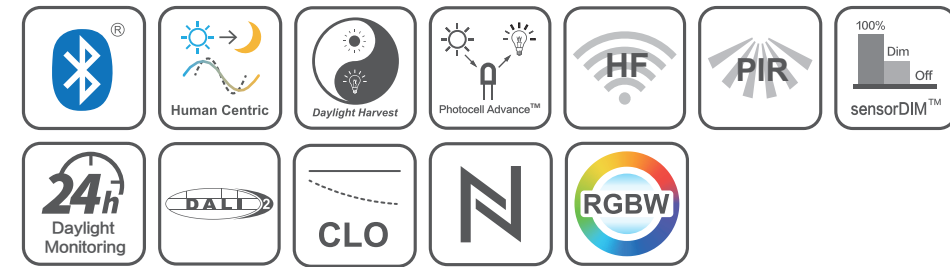


Excel, stylish cast aluminum asymmetric light, is ideally used for stair, corridor, aisle, pathways, traffic routes. Thanks to uniform light on the ground, the luminaire mark out traffic routes and passageways efficiently, which help passers-by quickly adapt to even darker areas.



Dimension

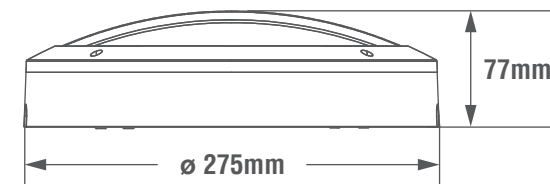

Photometrics

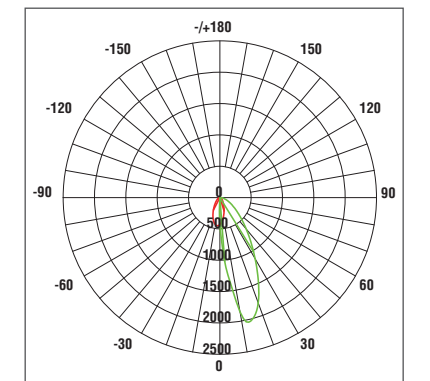

C0/C180: — C90/C270: —

Lumen Output

Model	Power	3000K	4000K	5000K
		35 lm/W	40 lm/W	45 lm/W
E275	18W	630 lm	730 lm	810 lm

• Lumen may fluctuate between ± 10%. Customized higher lumen output available.

Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	30°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP65

IK Rating	IK10
Fitting Material	Cast Aluminum
Electrical Class	I
Lifespan	L70B50: 76,000h
Standard	EN60598-2-1 / EN55015 / EN62778

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
EXL001	E275	18W	●								30K~40K	55 lm/W	∅ 275 * H 77



RGB light colour available
Colour changeable via remote or APP

