



Dana W is the asymmetric PC wall luminaire, ideally used for stair, corridor, or aisle.


- 1 • Cable entry from side and back • Through wiring from side to side
- 2 • IP65 water-proof • IK10 vandal-proof • UV-resistant housing
- 3 • Optional selectable power
- 4 • Scientific and rational light distribution. Most light emits downwards, and frontal glare is greatly reduced.
- 5 • Wide choice of intelligent functions, with/without Bluetooth, sensor, etc.



Dimension

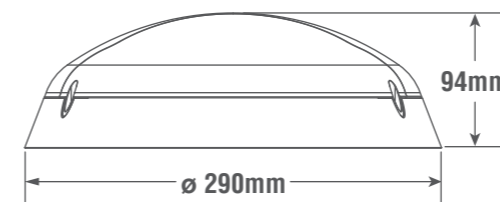

Photometrics

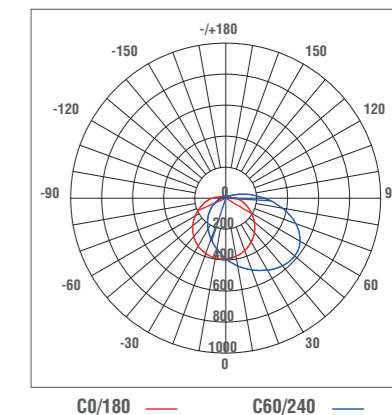

Lumen Output

Model	Power	3000K	4000K	5000K
		99 lm/W	104 lm/W	109 lm/W
DW290	12W	1200 lm	1248 lm	1272 lm
DW290	20W	2000 lm	2080 lm	2120 lm

• Lumen may fluctuate between ± 10%. Customized higher lumen output available.

Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	105°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP65

IK Rating	IK10
Fitting Material	Polycarbonate
Electrical Class	II
Lifespan	L70B50: 76,000h
Standard	EN60598-2-1 / EN55015 / EN62778

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
DAN030	DW290	20W		●							30K	83 lm/W	∅ 290 * H 94
DAN031	DW290	22W	●								30K	83 lm/W	∅ 290 * H 94
DAN032	DW290	22W	●								40K	88 lm/W	∅ 290 * H 94
DAN033	DW290	20W		●							40K	88 lm/W	∅ 290 * H 94
DAN035	DW290	20W	●								40K	88 lm/W	∅ 290 * H 94
DAN036	DW290	20W		●							30K	83 lm/W	∅ 290 * H 94
DAN037	DW290	20W		●							40K	88 lm/W	∅ 290 * H 94