



KRONUS

KS600 / KS1200 / KS1500


Tri-proof Light

Grey




Kronus, Tri-proof luminarie, is designed for use in areas with high requirements for dust and water resistance. It is especially recommended for lighting public facilities, garages, passages, warehouses, shops, food industry, commercial and industrial facilities (factories, laboratories), warehouses, parking lots (underground and multi-level), sports stadiums, transport terminals, and underground passages, basement, culvet, etc.

- 1 • Reserved BESA holes • Cable entry from side and back • Through wiring , 5x2.5mm²
- 2 • IP66 water-proof • IK10 vandal-proof
- 3 • Optional selectable color temperature • Optional selectable power
- 4 • Ceiling mounted • Installed in suspension with hanging wire
- 5 • PCB plate integrated with diffuser, save installation time and protect LED chips.
- 6 • Wide choice of intelligent functions, with/without Bluetooth, sensor, emergency, etc.





Photometrics

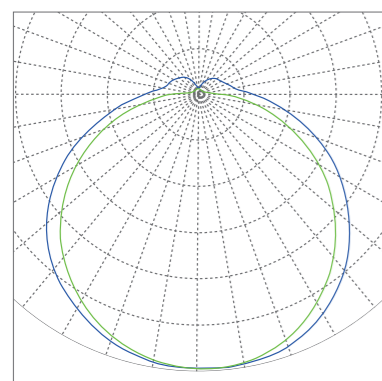

C0/C180: — C90/C270: —

Dimension

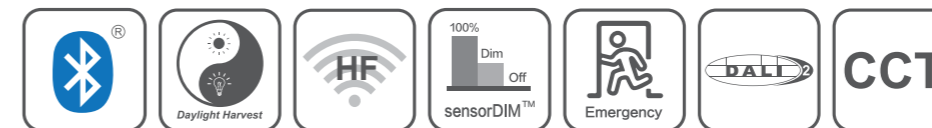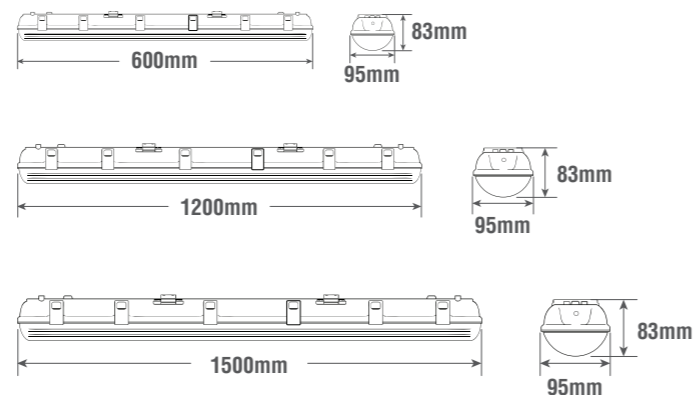

Lumen Output

Model	Power	3000K	4000K	5000K
		125 lm/W	130 lm/W	135 lm/W
KS600	9W	1110 lm	1150 lm	1180 lm
KS600	18W	2260 lm	2340 lm	2370 lm
KS1200	18W	2260 lm	2340 lm	2370 lm
KS1200	36W	4530 lm	4700 lm	4780 lm
KS1500	25W	3100 lm	3200 lm	3270 lm
KS1500	50W	6400 lm	6600 lm	6700 lm

• Lumen may fluctuate between $\pm 10\%$. Customized higher lumen output available.

Specification

Input Voltage	220-240VAC	Fitting Material	Polycarbonate
CRI	>80	Electrical Class	II
Power Factor	>0.9	Lifespan	L70B50: 176,000h L80B10: 95,000h
SDCM	3	Standard	EN60598-2-1 / EN55015 / EN62778 / EN60598-2-22
Beam Angle	120°	Emergency Lumen	200 ~ 400 lm
Operation Temp.	-20°C ~ +40°C	Battery	3h Duration
IP Rating	IP66		
IK Rating	IK10		

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
KRO001	KS1500	50W		●		●					40K	124 lm/W	L 1500 * W 95 * H 83