


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:222.1V I:0.0797A P:16.560W PF:0.9360 Freq:49.99Hz Lamp Flux:1024.64x1 lm		
Name: A6060-HC (环境灯) 10000K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 61.88 lm/W			
MODEL		I _{max} (cd)	1627	S/MH (C0/180)	1.27
NOMINAL POWER (W)	16	LOR (%)	100.0	S/MH (C90/270)	1.55
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	1024.6	η UP, DN (C0-180)	0.3, 80.5
NOMINAL FLUX (lm)	1024.64	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.4, 18.9
LAMPS INSIDE	1	η up (%)	0.6	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	222.1	η down (%)	99.4	CIBSE SHR MAX	0.15

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

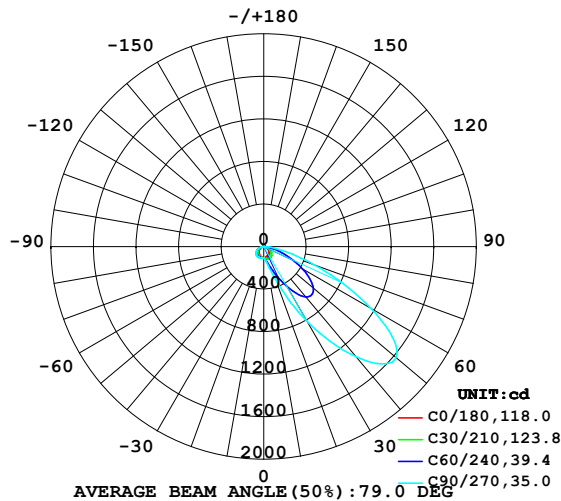

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

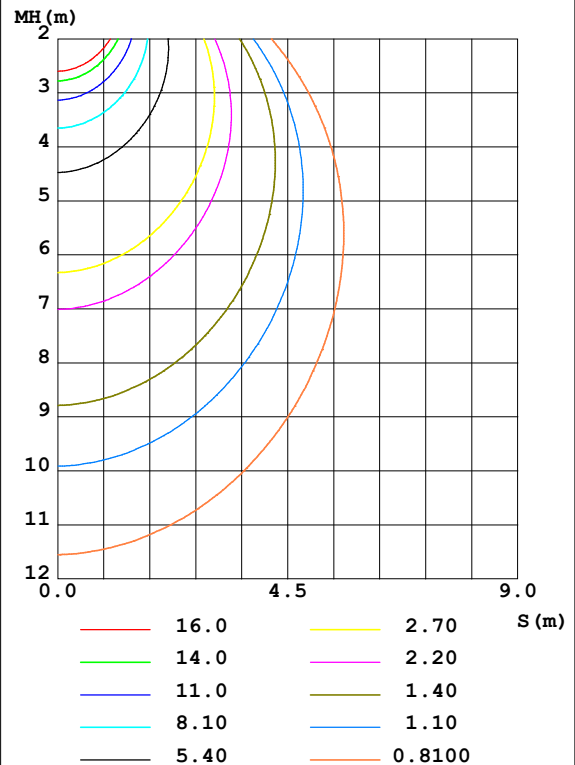

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-06-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks: 电源: BK-DWL022E-A0600ADP (400mA)、HC
D038/BT 灯板: GR6D-564-2X10S2P-V3.0
灯珠: L128-2280RA3565XXX, 2835双色
(1800K-10000K)
透镜: 24°透镜

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	104.7	123.7	144.8	122.5	106.4	107.3	109.9	108.0	0- 10	10.69	10.69	1.04,1.04
20	97.66	177.5	331.5	174.2	100.5	107.4	113.3	107.7	10- 20	37.07	47.76	4.66,4.66
30	88.48	276.2	806.5	274.9	92.12	104.7	113.1	104.5	20- 30	84.59	132.4	12.9,12.9
40	77.73	365.1	1353	375.6	82.37	98.67	108.6	97.73	30- 40	162.6	294.9	28.8,28.8
50	65.04	350.9	1625	372.4	70.73	87.56	96.48	85.53	40- 50	236.5	531.4	51.9,51.9
60	48.77	246.4	1167	268.1	55.76	69.64	76.07	66.15	50- 60	240.4	771.8	75.3,75.3
70	28.69	121.1	510.9	139.4	36.88	44.99	47.76	40.27	60- 70	162.0	933.9	91.1,91.1
80	8.692	32.40	124.4	43.44	15.78	18.23	18.28	14.10	70- 80	70.67	1005	98,98
90	0.4681	0.6519	1.360	1.041	1.382	2.021	2.102	2.015	80- 90	13.46	1018	99.4,99.4
100	0.4956	0.4983	0.7023	0.6444	0.8896	1.496	1.529	1.673	90-100	1.239	1019	99.5,99.5
110	0.5407	0.4289	0.4355	0.7257	0.9572	1.320	1.178	1.371	100-110	1.007	1020	99.6,99.6
120	0.6241	0.4360	0.4114	1.039	1.031	1.207	0.9615	1.162	110-120	0.8811	1021	99.7,99.7
130	0.7292	0.4882	0.4883	1.649	1.090	1.142	0.8228	1.005	120-130	0.8318	1022	99.7,99.7
140	0.8102	0.5770	0.6870	2.387	1.107	1.112	0.7927	0.9104	130-140	0.8050	1023	99.8,99.8
150	0.8861	0.7118	1.066	2.924	1.095	1.094	0.8628	0.8850	140-150	0.7451	1023	99.9,99.9
160	0.9637	0.8799	1.485	3.003	1.071	1.087	1.030	1.002	150-160	0.6108	1024	99.9,99.9
170	1.021	1.013	1.684	2.544	1.056	1.086	1.269	1.319	160-170	0.3963	1025	100,100
180	1.038	1.066	1.540	1.814	1.036	1.066	1.540	1.817	170-180	0.1342	1025	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 406.68 lm

%lum = 39.7%

%lamp = 39.7%

Conical surface Flux(120deg): 771.83 lm

%lum = 75.3%


%lamp = 75.3%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DWL022E-A0600ADP (400mA)、HC
D038/BT 灯板: GR6D-564-2X10S2P-V3.0
灯珠: L128-2280RA3565XXX, 2835双色
(1800K-10000K)
透镜:24°透镜

LUMINANCE LIMITATION CURVES

Test:U:222.1V I:0.0797A P:16.560W PF:0.9360 Freq:49.99Hz Lamp Flux:1024.64x1 lm		
Name: A6060-HC (环境灯) 10000K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

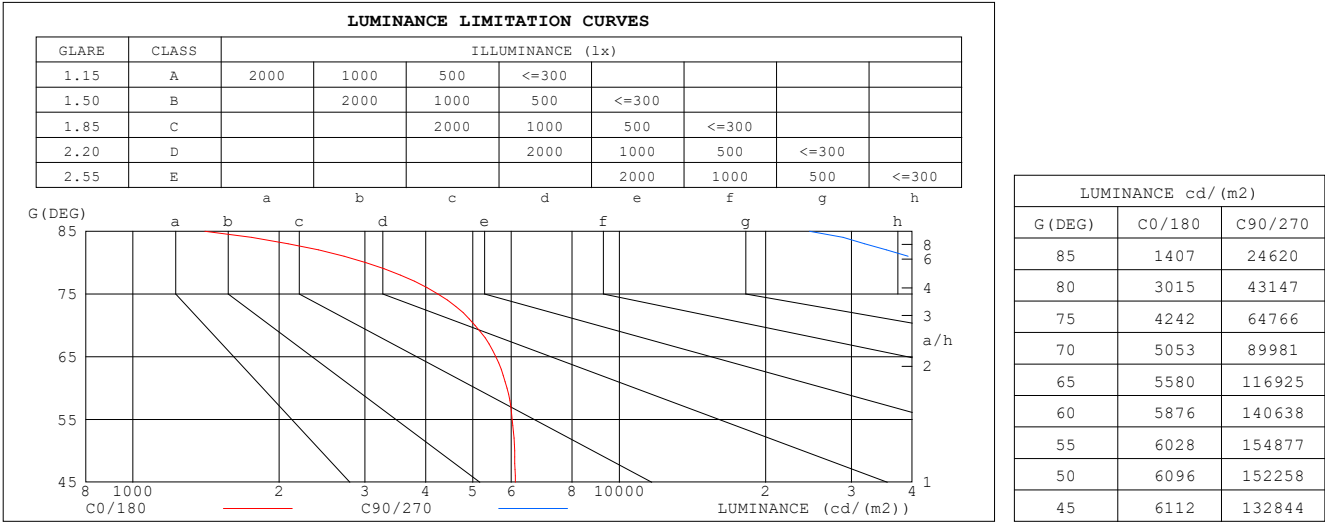


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DWL022E-A0600ADP (400mA)、HC
D038/BT 灯板: GR6D-564-2X10S2P-V3.0
灯珠: L128-2280RA3565XXX, 2835双色
(1800K-10000K)
透镜:24°透镜

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:222.1V I:0.0797A P:16.560W PF:0.9360 Freq:49.99Hz		
Lamp Flux:1024.64x1 lm		
Name: A6060-HC (环境灯) 10000K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	Coefficients of Utilization(CU)															
RCR:Room Cavity Ratio																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.03	.98	.94	1.00	.96	.92	.96	.92	.89	.92	.89	.86	.88	.86	.84	.81
2.0	.88	.80	.74	.86	.79	.73	.82	.76	.71	.78	.74	.69	.75	.71	.68	.65
3.0	.75	.66	.59	.73	.65	.58	.70	.63	.57	.67	.61	.56	.65	.59	.55	.53
4.0	.65	.55	.48	.63	.54	.47	.61	.53	.47	.58	.51	.46	.56	.50	.45	.43
5.0	.57	.47	.39	.55	.46	.39	.53	.45	.39	.51	.44	.38	.49	.43	.37	.35
6.0	.50	.40	.33	.49	.39	.33	.47	.38	.32	.45	.38	.32	.43	.37	.31	.29
7.0	.44	.35	.28	.43	.34	.28	.42	.33	.27	.40	.33	.27	.39	.32	.27	.25
8.0	.40	.30	.24	.39	.30	.24	.37	.29	.23	.36	.29	.23	.35	.28	.23	.21
9.0	.36	.27	.21	.35	.26	.21	.34	.26	.20	.33	.25	.20	.31	.25	.20	.18
10.0	.32	.24	.18	.32	.23	.18	.31	.23	.18	.30	.23	.18	.29	.22	.17	.16

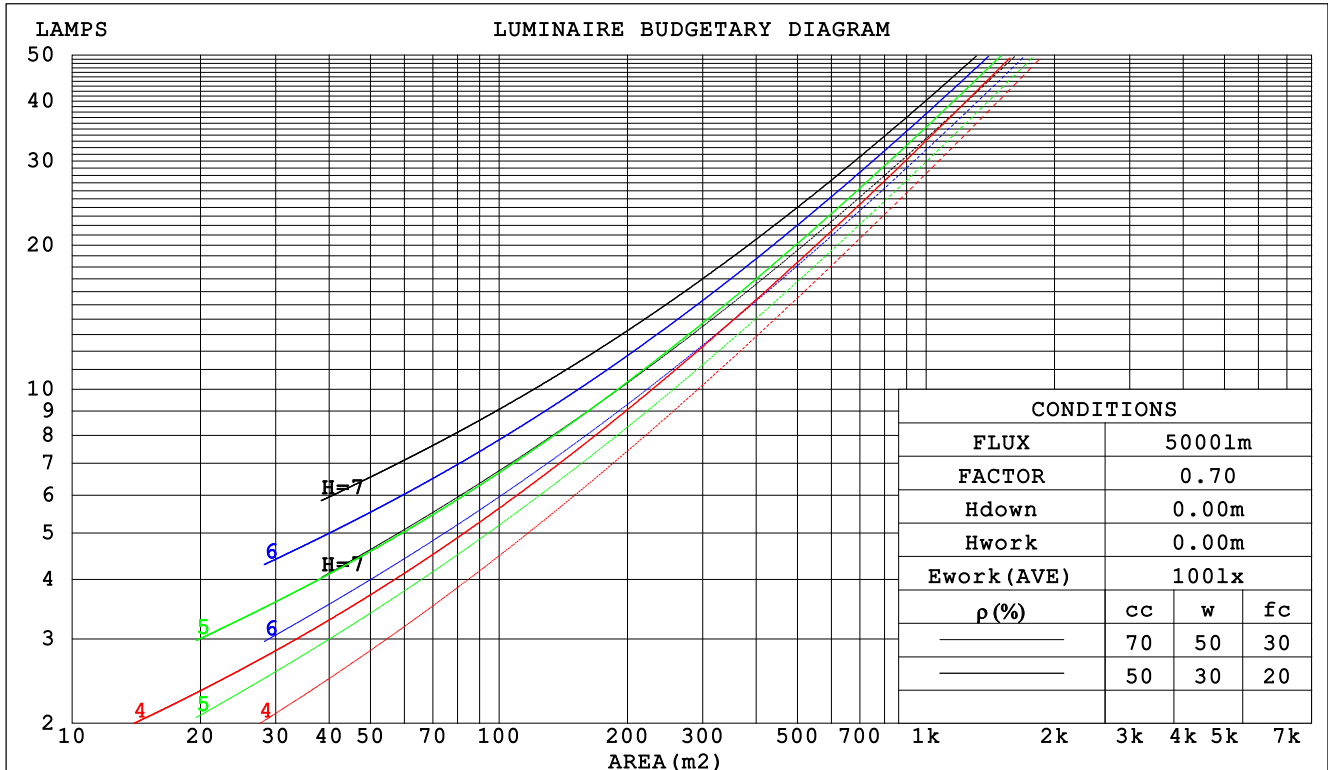

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DWL022E-A0600ADP (400mA)、HC
D038/BT 灯板: GR6D-564-2X10S2P-V3.0
灯珠: L128-2280RA3565XXX, 2835双色
(1800K-10000K)
透镜:24°透镜

WEC AND CCEC

Test:U:222.1V I:0.0797A P:16.560W PF:0.9360 Freq:49.99Hz		
Lamp Flux:1024.64x1 lm		
Name: A6060-HC (环境灯) 10000K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.331	.188	.060	.324	.185	.059	.310	.178	.057	.297	.171	.055	.286	.165	.053		
2.0	.318	.174	.053	.311	.171	.053	.299	.166	.052	.288	.161	.050	.277	.157	.049		
3.0	.296	.158	.047	.290	.156	.047	.279	.151	.046	.269	.148	.045	.260	.144	.045		
4.0	.274	.142	.042	.269	.141	.042	.259	.137	.041	.250	.134	.040	.241	.131	.040		
5.0	.253	.129	.037	.249	.128	.037	.240	.125	.037	.232	.122	.036	.224	.120	.036		
6.0	.235	.118	.034	.230	.116	.033	.222	.114	.033	.215	.112	.033	.208	.110	.033		
7.0	.218	.108	.031	.214	.107	.030	.207	.105	.030	.200	.103	.030	.194	.101	.030		
8.0	.203	.099	.028	.199	.098	.028	.193	.096	.028	.187	.095	.027	.181	.093	.027		
9.0	.189	.092	.026	.186	.091	.025	.181	.089	.025	.175	.088	.025	.170	.086	.025		
10.0	.177	.085	.024	.175	.084	.024	.169	.083	.023	.165	.082	.023	.160	.080	.023		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.195	.195	.195	.167	.167	.167	.114	.114	.114	.065	.065	.065	.021	.021	.021	
1.0	.187	.161	.138	.160	.138	.118	.109	.095	.082	.063	.055	.048	.020	.018	.015	
2.0	.181	.137	.100	.155	.118	.086	.106	.081	.060	.061	.047	.035	.020	.015	.012	
3.0	.175	.120	.076	.150	.103	.066	.103	.072	.046	.059	.042	.027	.019	.014	.009	
4.0	.168	.107	.060	.144	.092	.052	.099	.064	.037	.057	.038	.022	.018	.012	.007	
5.0	.161	.097	.049	.139	.084	.042	.095	.058	.030	.055	.034	.018	.018	.011	.006	
6.0	.154	.089	.041	.133	.077	.036	.092	.054	.025	.053	.032	.015	.017	.010	.005	
7.0	.148	.082	.036	.127	.071	.031	.088	.050	.022	.051	.029	.013	.016	.010	.004	
8.0	.141	.076	.032	.121	.066	.028	.084	.046	.020	.049	.027	.012	.016	.009	.004	
9.0	.135	.071	.029	.116	.062	.025	.080	.044	.018	.047	.026	.011	.015	.008	.003	
10.0	.129	.067	.026	.111	.058	.023	.077	.041	.016	.045	.024	.010	.015	.008	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DWL022E-A0600ADP (400mA)、HC
D038/BT 灯板: GR6D-564-2X10S2P-V3.0
灯珠: L128-2280RA3565XXX, 2835双色
(1800K-10000K)
透镜:24°透镜

UGR(Unified Glare Rating) Table

Test:U:222.1V I:0.0797A P:16.560W PF:0.9360 Freq:49.99Hz Lamp Flux:1024.64x1 lm										
Name: A6060-HC (环境灯) 10000K					Type: 矩形					
MFR.:					DIM.: 595*595*71 (mm)					
					SUR.: 553*30.3 (mm)					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.9	9.7	8.3	10.1	10.4	33.8	35.5	34.1	35.9	36.2
3H	10.6	12.2	11.0	12.6	13.0	35.3	36.9	35.7	37.3	37.7
4H	11.8	13.3	12.2	13.6	14.0	35.7	37.3	36.1	37.6	38.0
6H	12.5	13.9	12.9	14.3	14.7	35.9	37.4	36.4	37.7	38.1
8H	12.6	14.0	13.1	14.4	14.8	36.0	37.3	36.4	37.7	38.1
12H	12.7	14.0	13.1	14.4	14.8	36.0	37.3	36.4	37.7	38.1
4H 2H	18.9	20.4	19.3	20.8	21.2	33.7	35.2	34.1	35.6	35.9
3H	19.5	20.8	19.9	21.2	21.6	35.4	36.6	35.8	37.0	37.5
4H	19.7	20.8	20.1	21.3	21.7	35.8	37.0	36.3	37.4	37.9
6H	19.8	20.8	20.2	21.3	21.7	36.1	37.2	36.6	37.6	38.1
8H	19.8	20.7	20.3	21.2	21.7	36.2	37.2	36.7	37.6	38.1
12H	19.8	20.7	20.3	21.1	21.6	36.3	37.1	36.7	37.6	38.1
8H 4H	22.0	22.9	22.5	23.4	23.9	35.8	36.8	36.3	37.2	37.7
6H	22.1	22.9	22.6	23.4	23.9	36.1	36.9	36.6	37.4	37.9
8H	22.1	22.8	22.6	23.3	23.8	36.2	36.9	36.7	37.4	37.9
12H	22.1	22.7	22.6	23.2	23.8	36.3	36.9	36.8	37.4	38.0
12H 4H	22.3	23.2	22.8	23.7	24.2	35.8	36.7	36.3	37.1	37.6
6H	22.5	23.2	23.0	23.7	24.2	36.1	36.8	36.6	37.3	37.8
8H	22.5	23.2	23.0	23.7	24.2	36.2	36.8	36.7	37.3	37.9
CIE190: 2010										

CIE190: 2010
Area: 0.0166 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DWL022E-A0600ADP (400mA)、HC
D038/BT 灯板: GR6D-564-2X10S2P-V3.0
灯珠: L128-2280RA3565XXX, 2835双色
(1800K-10000K)
透镜:24°透镜

UTILIZATION FACTORS TABLE

Test:U:222.1V I:0.0797A P:16.560W PF:0.9360 Freq:49.99Hz Lamp Flux:1024.64x1 lm		
Name: A6060-HC (环境灯) 10000K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	47	34	26	46	34	26	45	33	25	18
0.80	59	45	37	57	45	36	55	44	36	28
1.00	69	56	48	67	55	47	65	57	47	39
1.25	77	65	57	76	64	57	73	63	56	47
1.50	83	72	64	81	71	63	78	69	62	54
2.00	91	82	74	89	80	74	86	78	72	63
2.50	96	87	80	94	86	79	90	83	78	69
3.00	100	92	86	98	91	85	93	88	83	74
4.00	104	98	93	102	96	91	97	93	89	79
5.00	107	102	97	105	100	95	100	96	92	83
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7125]
 Remarks: 电源: BK-DWL022E-A0600ADP (400mA)、HC
 D038/BT 灯板: GR6D-564-2X10S2P-V3.0
 灯珠: L128-2280RA3565XXX, 2835双色
 (1800K-10000K)
 透镜: 24°透镜

ISOCANDELA DIAGRAM

Test:U:222.1V I:0.0797A P:16.560W PF:0.9360 Freq:49.99Hz Lamp Flux:1024.64x1 lm		
Name: A6060-HC (环境灯) 10000K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

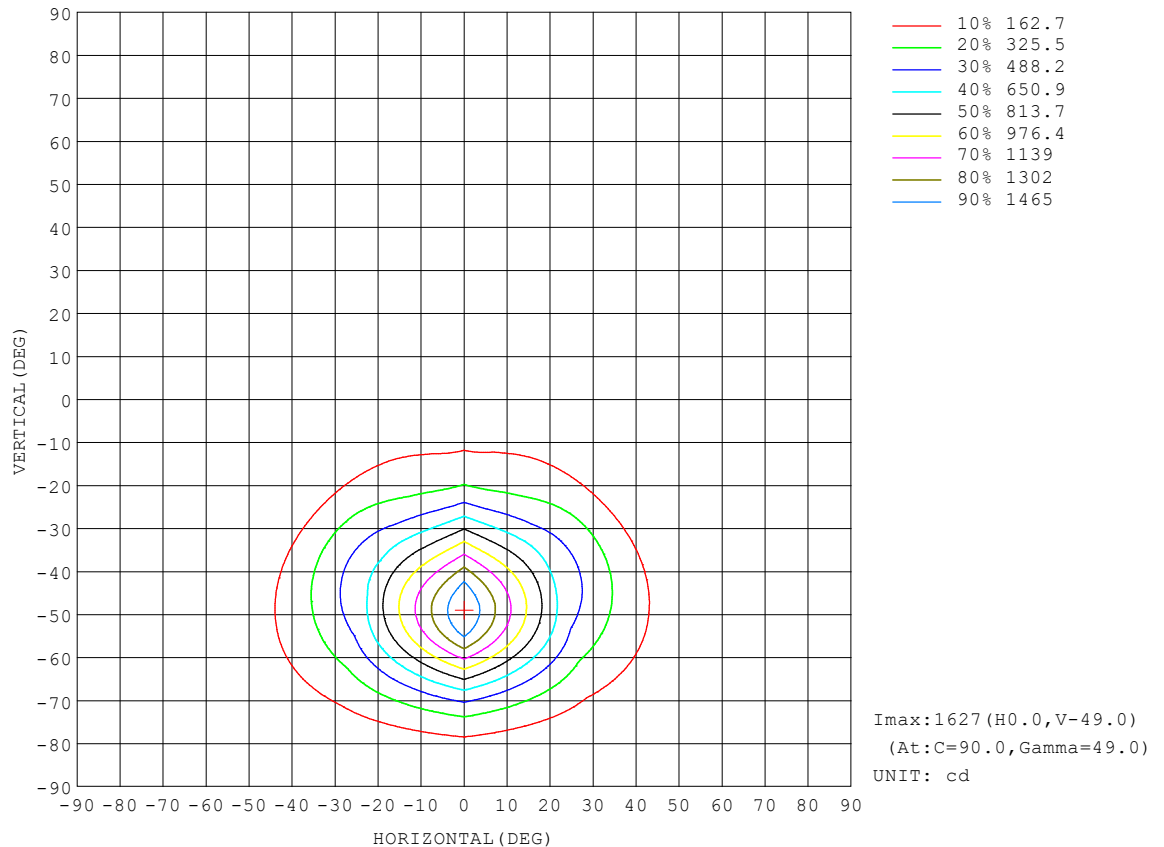


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DWL022E-A0600ADP (400mA)、HC
D038/BT 灯板: GR6D-564-2X10S2P-V3.0
灯珠: L128-2280RA3565XXX, 2835双色
(1800K-10000K)
透镜:24°透镜

AAI Figure

Test:U:222.1V I:0.0797A P:16.560W PF:0.9360 Freq:49.99Hz Lamp Flux:1024.64x1 lm		
Name: A6060-HC (环境灯) 10000K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

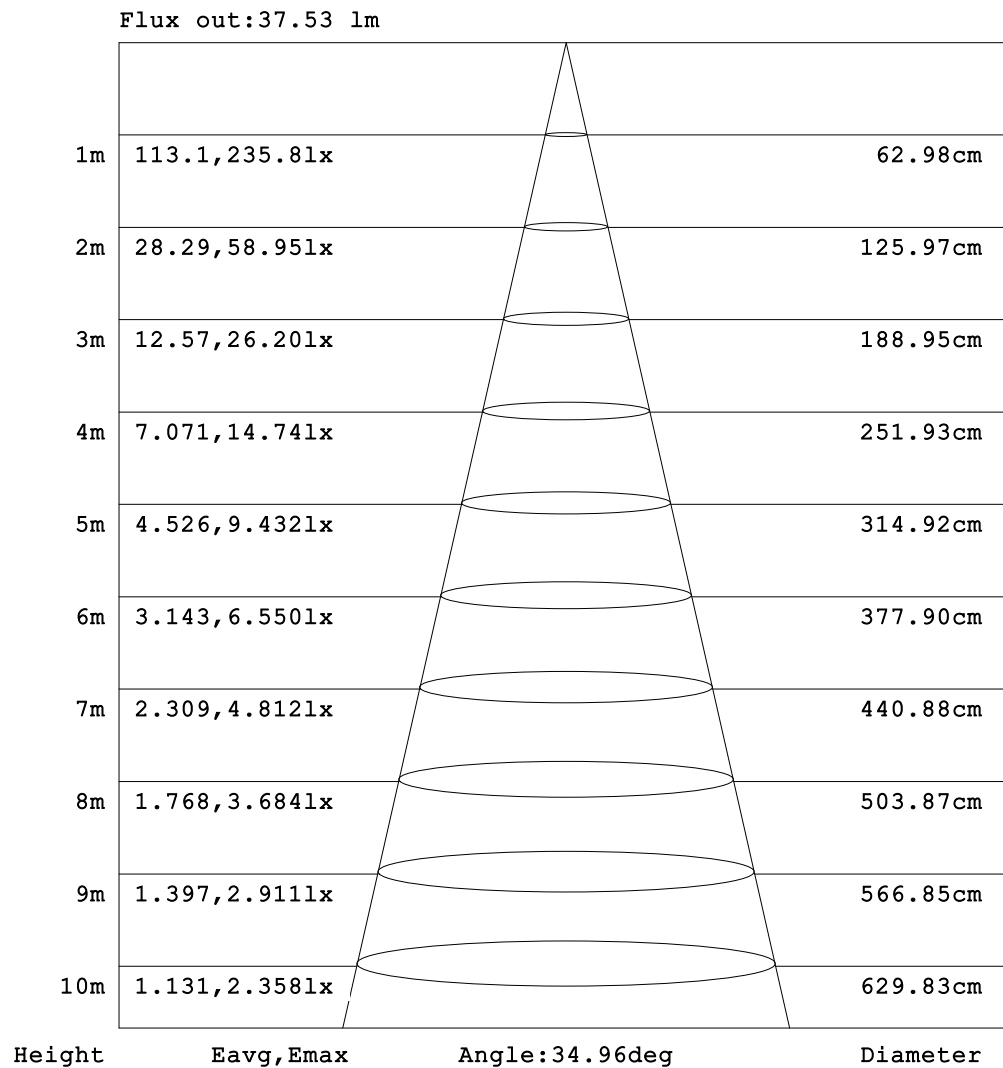


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DWL022E-A0600ADP (400mA)、HC
D038/BT 灯板: GR6D-564-2X10S2P-V3.0
灯珠: L128-2280RA3565XXX, 2835双色
(1800K-10000K)
透镜:24°透镜

ISOLUX DIAGRAM


Test:U:222.1V I:0.0797A P:16.560W PF:0.9360 Freq:49.99Hz Lamp Flux:1024.64x1 lm		
Name: A6060-HC (环境灯) 10000K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

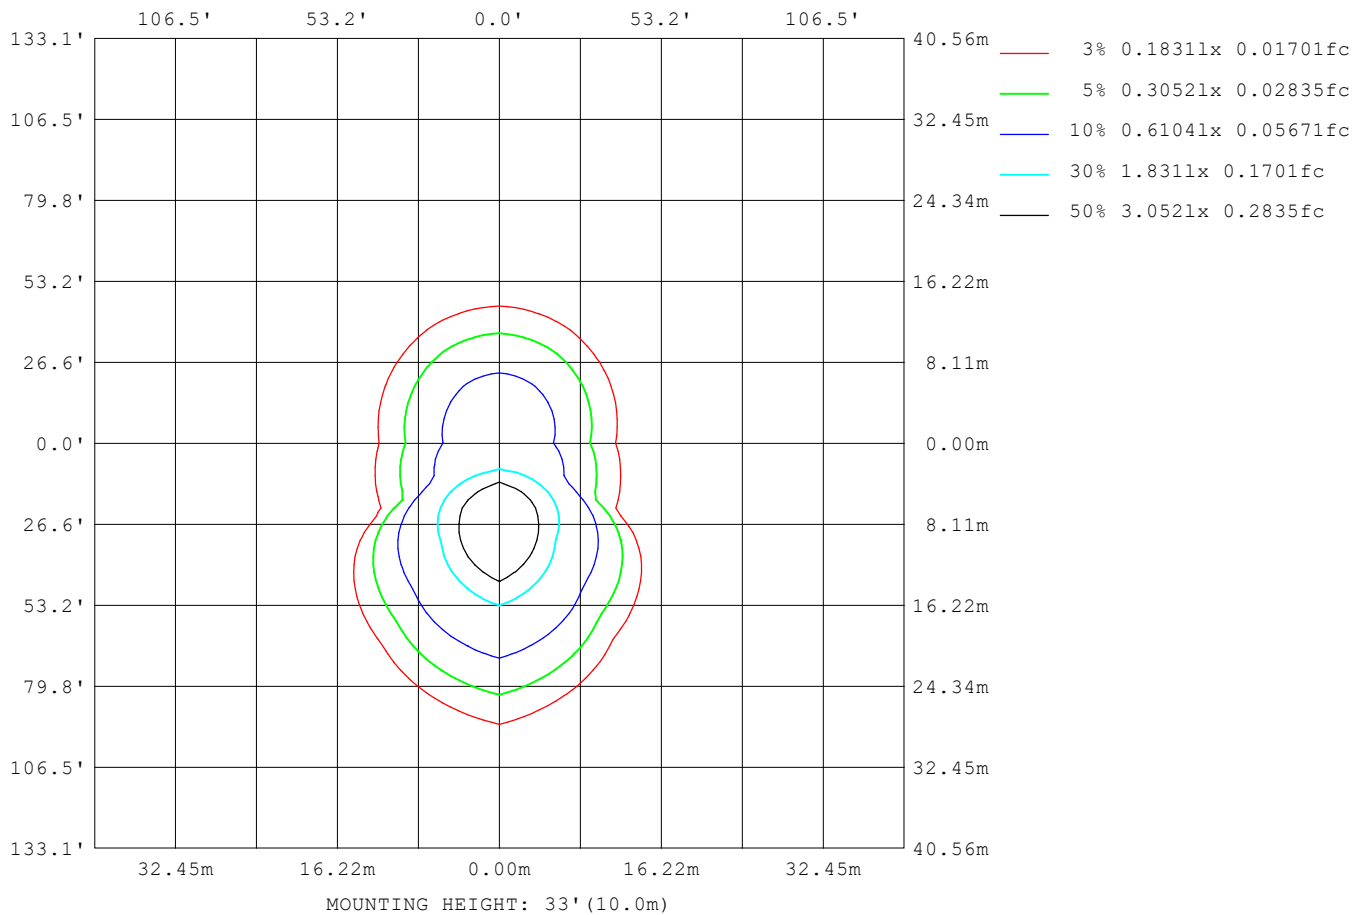

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks: 电源: BK-DWL022E-A0600ADP (400mA)、HC
D038/BT 灯板: GR6D-564-2X10S2P-V3.0
灯珠: L128-2280RA3565XXX, 2835双色
(1800K-10000K)
透镜: 24°透镜

Planar Illuminance Curve

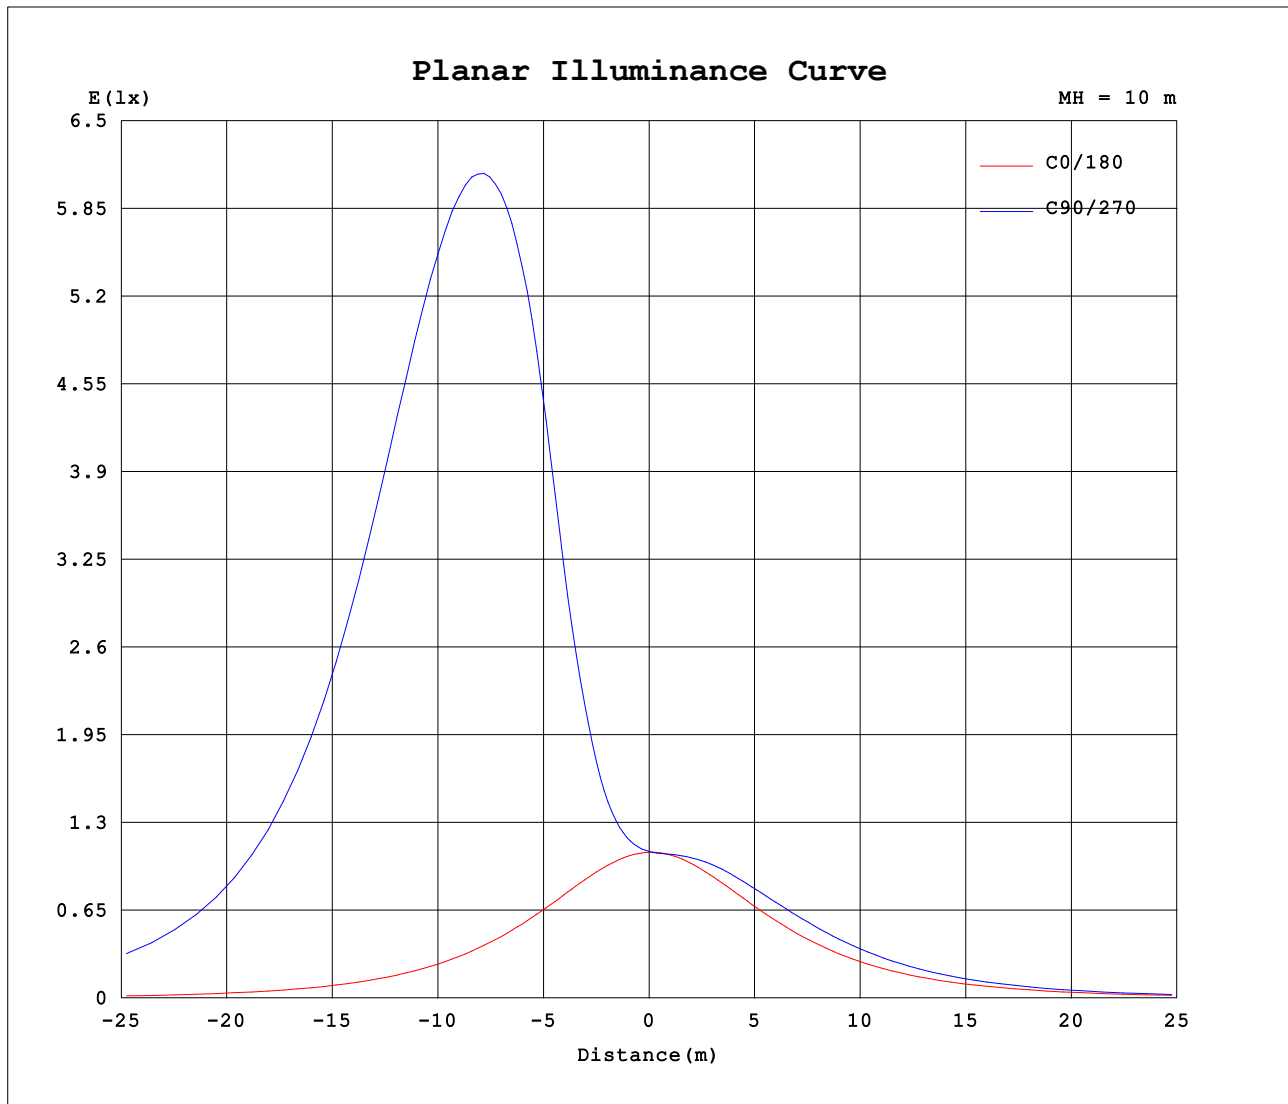

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks: 电源: BK-DWL022E-A0600ADP (400mA)、HC
D038/BT 灯板: GR6D-564-2X10S2P-V3.0
灯珠: L128-2280RA3565XXX, 2835双色
(1800K-10000K)
透镜: 24°透镜

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:222.1V I:0.0797A P:16.560W PF:0.9360 Freq:49.99Hz Lamp Flux:1024.64x1 lm		
Name: A6060-HC (环境灯) 10000K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	108	108	108	109	109	109	108	108	108	109	109	109						
5	107	110	115	118	115	111	108	107	107	108	108	108						
10	105	114	134	145	132	114	106	106	108	110	109	107						
15	102	118	171	209	167	117	104	105	110	112	110	106						
20	97.7	123	232	332	227	121	101	104	111	113	111	104						
25	93.2	125	319	538	314	124	96.6	102	110	114	111	102						
30	88.5	125	428	807	425	125	92.1	100	109	113	109	99.7						
35	83.2	121	539	1084	546	121	87.4	97.1	107	111	107	96.3						
40	77.7	113	617	1353	636	115	82.4	93.2	104	109	104	91.9						
45	71.7	104	640	1559	673	106	76.9	88.4	99.4	104	98.4	86.4						
50	65.0	93.0	609	1625	649	95.6	70.7	82.2	92.9	96.5	91.5	79.5						
55	57.4	81.5	530	1475	573	84.6	63.8	74.6	84.4	87.4	82.5	71.1						
60	48.8	69.4	423	1167	463	73.1	55.8	65.4	73.9	76.1	71.3	61.0						
65	39.1	56.2	308	820	343	60.9	46.9	54.6	61.5	62.7	58.3	49.3						
70	28.7	41.9	200	511	231	47.7	36.9	42.5	47.5	47.8	44.0	36.6						
75	18.2	27.1	114	278	137	33.6	26.2	29.7	32.9	32.5	29.3	23.8						
80	8.69	13.4	51.4	124	67.2	19.6	15.8	17.4	19.1	18.3	16.0	12.2						
85	2.04	3.35	13.3	35.6	22.3	7.77	6.84	7.27	8.05	7.21	6.00	4.14						
90	0.47	0.48	0.82	1.36	1.02	1.06	1.38	1.84	2.21	2.10	2.17	1.86						
95	0.48	0.46	0.66	0.97	0.69	0.66	0.86	1.40	1.79	1.78	1.89	1.80						
100	0.50	0.45	0.55	0.70	0.57	0.72	0.89	1.38	1.62	1.53	1.65	1.70						
105	0.52	0.44	0.47	0.53	0.50	0.82	0.93	1.35	1.46	1.33	1.43	1.59						
110	0.54	0.43	0.43	0.44	0.47	0.98	0.96	1.32	1.33	1.18	1.25	1.49						
115	0.58	0.43	0.41	0.40	0.50	1.19	1.00	1.28	1.23	1.06	1.12	1.39						
120	0.62	0.46	0.42	0.41	0.60	1.47	1.03	1.25	1.16	0.96	1.02	1.30						
125	0.68	0.48	0.43	0.44	0.79	1.84	1.07	1.23	1.11	0.88	0.94	1.21						
130	0.73	0.52	0.45	0.49	1.07	2.23	1.09	1.21	1.07	0.82	0.88	1.13						
135	0.77	0.56	0.49	0.57	1.44	2.60	1.10	1.19	1.05	0.79	0.83	1.07						
140	0.81	0.61	0.54	0.69	1.88	2.90	1.11	1.18	1.04	0.79	0.80	1.02						
145	0.85	0.66	0.61	0.85	2.33	3.07	1.10	1.16	1.05	0.82	0.79	0.98						
150	0.89	0.72	0.70	1.07	2.74	3.10	1.09	1.14	1.04	0.86	0.81	0.96						
155	0.93	0.78	0.81	1.29	3.06	3.01	1.08	1.12	1.05	0.94	0.88	0.96						
160	0.96	0.84	0.92	1.48	3.20	2.80	1.07	1.10	1.07	1.03	1.00	1.00						
165	0.99	0.90	1.01	1.62	3.14	2.52	1.06	1.09	1.09	1.14	1.18	1.09						
170	1.02	0.94	1.08	1.68	2.89	2.20	1.06	1.07	1.11	1.27	1.42	1.22						
175	1.03	0.98	1.11	1.65	2.51	1.86	1.05	1.04	1.12	1.40	1.72	1.35						
180	1.04	1.01	1.12	1.54	2.09	1.53	1.04	1.01	1.12	1.54	2.10	1.54						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DWL022E-A0600ADP (400mA)、HC
D038/BT 灯板: GR6D-564-2X10S2P-V3.0
灯珠: L128-2280RA3565XXX, 2835双色
(1800K-10000K)
透镜:24°透镜