



# MOON M320

## Rope Suspended

White  
RAL9003

Grey  
RAL9006




Moon is an elegant PC luminaire that is ideal for setting up in publicly accessible areas, such as circulation spaces, stairwells, hallways, passageways, metro and train stations, but can also be used in institutions and schools, residential areas.

- Reserved BESA holes, Key holes • Cable entry from side and back  
• Through wiring from side to side
- IP54 water-proof • IK10 vandal-proof
- Optional selectable power
- Ceiling/wall mounted, or installed in suspension  
• PC Mounting box is optional, no need to open fixture
- Wide choice of intelligent functions, with/without Bluetooth, sensor, emergency, DALI, etc.






### Photometrics

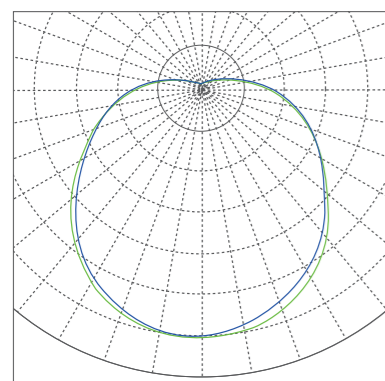

C0/C180: — C90/C270: —

### Dimension

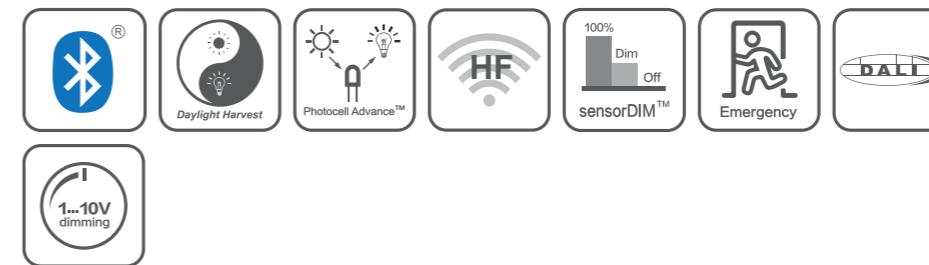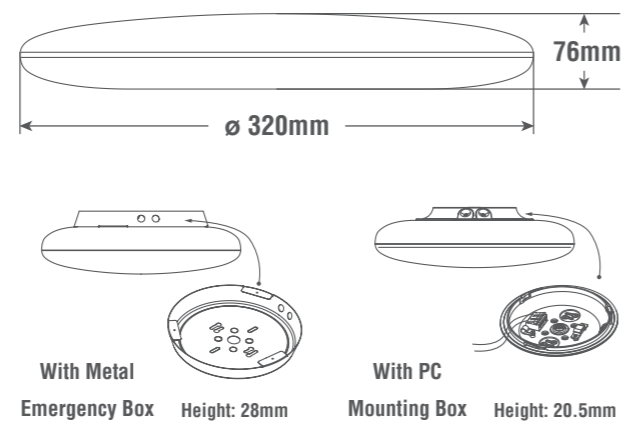

### Lumen Output

Model	Power	3000K	4000K	5000K
		85 lm/W	90 lm/W	95 lm/W
M320	12W	1050 lm	1110 lm	1130 lm
M320	18W	1530 lm	1580 lm	1660 lm
M320	28W	2550 lm	2700 lm	2750 lm

• Lumen may fluctuate between  $\pm 10\%$ . Customized higher lumen output available.

### Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	120°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP54
IK Rating	IK10
Fitting Material	Polycarbonate

Electrical Class	II
Standard Lifespan	L70B50: 64,000h
Premium Lifespan	L70B50: 148,000h L80B10: 78,000h
Standard	EN60598-2-1 / EN55015 / EN62778 / EN60598-2-22
Emergency Lumen	200 ~ 400 lm
Battery	3h Duration

### Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
MON001	M320	28W		●		●					30K	85 lm/W	∅ 320 * H 76
MON002	M320	28W		●		●					40K	85 lm/W	∅ 320 * H 76
MON003	M320	28W		●			●				30K	85 lm/W	∅ 320 * H 76
MON004	M320	28W		●			●				40K	85 lm/W	∅ 320 * H 76