



SUSPENDED LIGHT



Gemini, the linear suspended light, provides both direct and indirect light. Various dimensions, diversified optics and low UGR options, makes it ideal for office lighting and conference rooms.


Photometrics

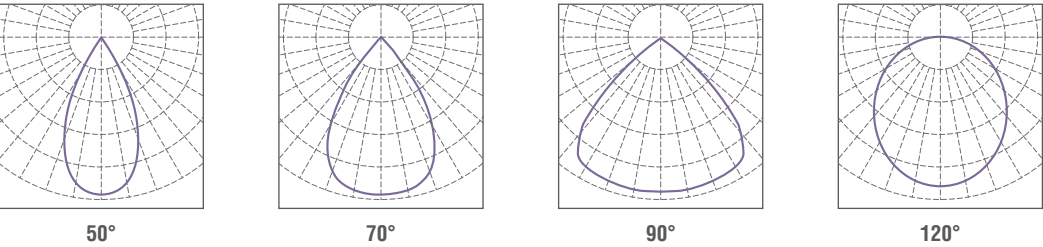

Dimension



SUSPENDED LIGHT

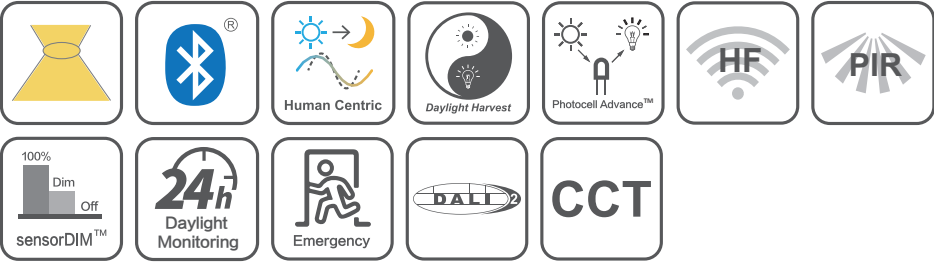

Lumen Output

Model	UGR	Power	3000K	4000K	5000K
G1200-N			105 lm/W	110 lm/W	115 lm/W
	<16	34W	3570 lm	3740 lm	3910 lm

Model	UGR	Power	3000K	4000K	5000K
G1200-M			155 lm/W	160 lm/W	165 lm/W
	<19	34W	5270 lm	5440 lm	5610 lm

Model	UGR	Power	3000K	4000K	5000K
G1200-W			125 lm/W	130 lm/W	135 lm/W
	<19	34W	4250 lm	4420 lm	4590 lm

• Lumen may fluctuate between ± 10%. Customized higher lumen output available.

Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	50° / 70° / 90° / 120°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP20

Fitting Material	Cast aluminum
Electrical Class	I
Lifespan	L70B50: 76,000h
Standard	EN60598-2-1 / EN55015 / EN62778 / EN60598-2-22
Emergency Lumen	200 ~ 400 lm
Battery	3h Duration

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
GEM001	G1200-N	34W			●	●					30K~50K	105 lm/W	L 1335 * W 52 * H100