






Atlas is designed for use in areas with high requirements for dust and resistance. It is especially recommended for lighting public spaces like garages, warehouse, factories, sports stadium, transport terminals, basement, etc.



### Dimension

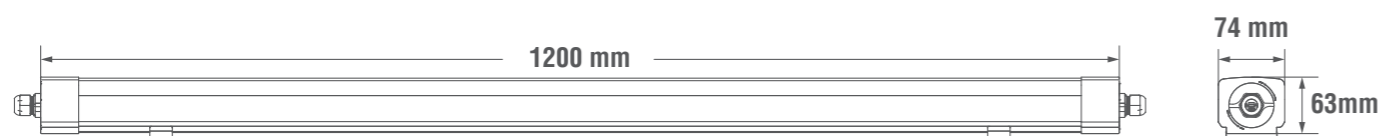

### Photometrics

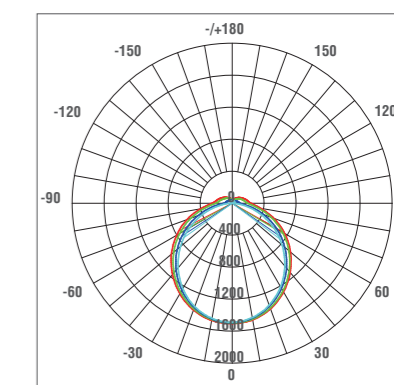

C0/180: — C30/210: —  
C60/240: — C90/270: —

### Lumen Output

Model	Power	3000K	4000K	5000K
		125 lm/W	130 lm/W	135 lm/W
A1200	38W	4750 lm	5000 lm	5130 lm

• Lumen may fluctuate between  $\pm 10\%$ . Customized higher lumen output available.

### Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	120°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP65
IK Rating	IK10 / IK07

Fitting Material	Polycarbonate
Electrical Class	II
Lifespan	L70B50: 162,000h L80B10: 85,000h
Standard	EN60598-2-1 / EN55015 / EN62778 / EN60598-2-22
Emergency Lumen	200 ~ 400 lm
Battery	3h Duration

### Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
ATL001	A1200	38W			●	●					50K	124 lm/W	L 1200 * W 74 * H 63