







Focus, the square ceiling light of slim design, can be used in any residential or commercial places.

Photometrics

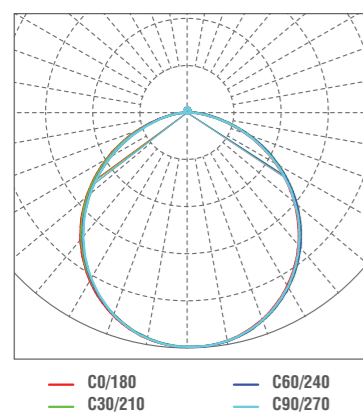

Dimension

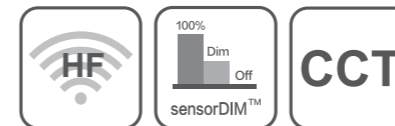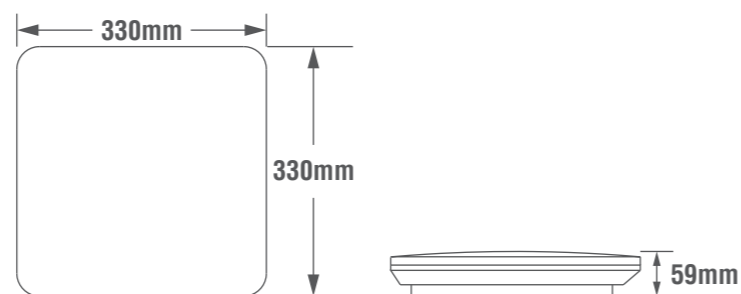

Lumen Output

Model	Power	3000K	4000K	5000K
		105 lm/W	110 lm/W	115 lm/W
F330	10W	1050 lm	1100 lm	1110 lm
F330	14W	1470 lm	1540 lm	1550 lm
F330	18W	1890 lm	1980 lm	1990 lm
F330	22W	2310 lm	2420 lm	2440 lm

• Lumen may fluctuate between $\pm 10\%$. Customized higher lumen output available.

Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	120°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP54
IK Rating	IK08
Fitting Material	PC Diffuser + ABS Base

Electrical Class	II
Standard Lifespan	L70B50: 64,000h
Premium Lifespan	L70B50: 176,000h L80B10: 95,000h
Standard	EN60598-2-1 / EN55015 / EN62778 / EN60598-2-22
Emergency Lumen	200 ~ 400 lm
Battery	3h Duration

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
FOC001	F330	22W	●								40K	110 lm/W	L 330 * W 330 * H 59