


ACIS AA275/AA350



Tiltable PCB Plate

Ring Options

- White RAL9003
- Grey RAL7045
- Anthracite RAL7016
- Black RAL9005

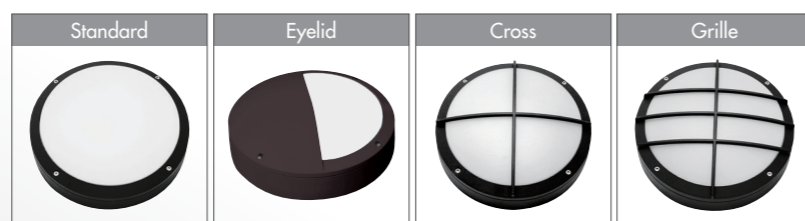

Features & Benefits


Acis is a stylish cast aluminum luminaire, with a modern look and low height. The luminaire can be delivered in several colors and with multiple rings, which gives different visual expression. It can be used as facade lighting and common areas in housing and profession.

- Cable entry from side and back • Through wiring from side to side
- IP65 water-proof • IK10 vandal-proof
- Optional selectable color temperature • Optional selectable power
- Ceiling / Wall mounted • Quick installation thanks to tiltable LED plate
- Powder coated paint finish • UV-proof diffuser
- Wide choice of intelligent functions, with/without Bluetooth, sensor, emergency, DALI, etc.


Function



Dimensions

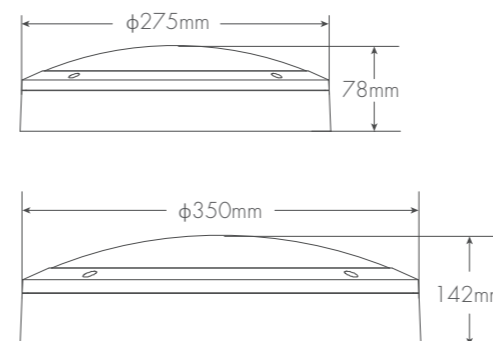

Photometrics

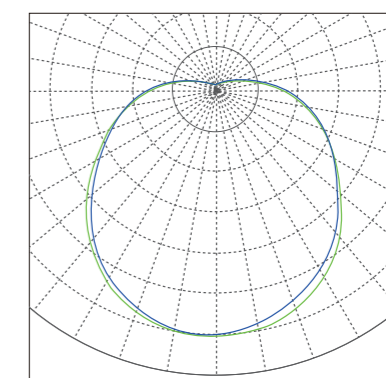

Lumen Output

Model	Power	Ring Option	3000K	4000K	5000K	Colour Temp.	Lumen Efficiency
AA275	18W	Standard/Cross/Grill	1890lm	1920lm	1960lm (±10%)	3000K	95 lm/W
AA275	12W	Eyelid	810lm	840lm	860lm (±10%)	4000K	100 lm/W
AA350	28W	Standard	2400lm	2520lm	2600lm (±10%)	5000K	105 lm/W

• Customized higher lumen output available

Specification

Input Voltage	CRI	Power Factor	SDCM	Beam Angle	Operation Temp.	IP/IK	Fitting Material	Class
220~240VAC	>80	>0.9	3	110°	-20°C~+40°C	IP65/IK10	Cast Aluminum	I

Standard Lifespan	Premium Lifespan	Standard	Emergency Lumen	Battery
L70B50: 50,000h	L70B50: 125,000h / L80B10: 65,000h	EN60598-2-1/EN55015/EN62778/EN60598-2-22	200lm~400lm	3h Duration

Model	Carton (L x W x H)	QTY/CTN	QTY/20'GP	QTY/40'GP	QTY/40'HQ
AA275	42.3 x 32.5 x 33 cm	4 pcs	2204 PCS / 551 CTNS	4848 PCS / 1212 CTNS	5464 PCS / 1366 CTNS
AA350	57.3 x 39.8 x 40.3 cm	4 pcs	1088 PCS / 272 CTNS	2392 PCS / 598 CTNS	2696 PCS / 674 CTNS